




Hettich

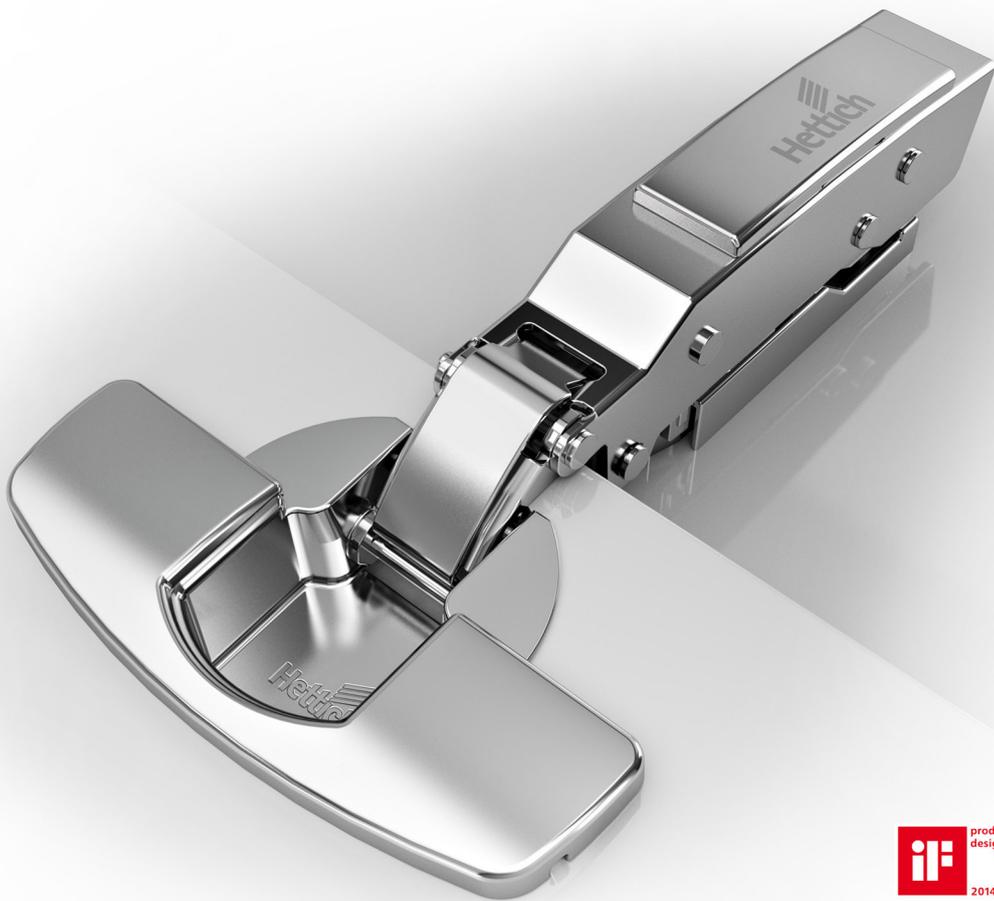

 product
design award
2014

Index

Hettich - Furniture Fittings	
Hinges	02 - 11
Drawers and Runners	12-19
Drawer components	20-22
Inserts	23-25
Sliding and Folding	26-43
Fittings	44-51
Handles	52-53
Office Systems	54-59




Technology for furniture – our passion for over a century. Throughout the world, the Hettich brand stands for quality, innovation, reliability and closeness to customers. Some 6,000 people at Hettich develop intelligent technology for furniture – with renewed commitment every day. Hettich is at home in Kirchleugern, Germany, where we create compelling solutions for people around the globe – solutions that make a big difference in furniture and in people's lives.

****Hettich Core is all ex stock from NAA - To view the full Hettich Range please see catalogues all available on request or online at www.hettich.com**



Hinges

Fast assembly concealed hinge with integrated Silent System

- Sensys 8645i
- Opening angle 110°, packaging unit 200 ea.
 - Concealed hinge with clip on installation & integrated Silent System
 - Quality classification under EN 15570, Level 3
 - For door thickness 15 - 24 mm
 - Cup diameter 35 mm
 - Cup depth 12.8 mm
 - Integrated +/- 2 mm overlay adjustment
 - Integrated depth adjustment + 3 mm / - 2 mm
 - Height adjustment at mounting plate
 - Hinge arm material: steel, nickel plated
 - Hinge cup material: steel, nickel plated

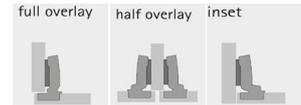

Drilling Pattern




Description	Type	Item code	PU	Vol/ Page
Screw on TH 42	Full overlay	9071205	200	1/33
	Half overlay	9073606	50	1/32
	Inset	9073607	50	1/32
Flash fast assembly THS55 Fits Hettich Machines	Full overlay	9073611	200	1/32
	Half overlay	9073612	50	1/32
	Inset	9073613	50	1/32
Flash fast assembly THS55 Fits Orange Machines	Full overlay	9073623	200	1/32
	Half overlay	9073624	50	1/32
	Inset	9073625	50	1/32
Angle limiter, restricts from 110 to 85		9072540	50	1/82
Angle limiter installation aid		9081657	100	1/84



See page 10 & 11 for mounting options

Fast assembly concealed hinge with integrated Silent System

- Sensys 8631i for **thick doors**
- Opening angle 95°
 - Concealed hinge with clip on installation and integrated Silent System
 - Quality classification under EN 15570, Level 2
 - For door thickness of 15 – 32 mm
 - Cup diameter 35 mm
 - Cup depth 12.8 mm
 - Integrated overlay adjustment + 2 mm / - 2 mm
 - Integrated depth adjustment + 3 mm / - 2 mm
 - Height adjustment at mounting plate
 - Hinge arm material: steel nickel plated
 - Hinge cup material: steel nickel plated



Drilling Pattern



Description	Type	Item code	PU	Vol/ Page
Screw on TH 42	Full overlay	9091400	50	1/38
	Half overlay	9091410	50	1/38
	Inset	9091420	50	1/38
Flash fast assembly TH54 Fits Hettich Machines	Full overlay	9091402	50	1/38
	Half overlay	9091412	50	1/38
	Inset	9091422	50	1/38
Flash fast assembly TB54 Fits Orange Machines	Full overlay	9091432	50	1/38
	Half overlay	9091442	50	1/38
	Inset	9091452	50	1/38
Angle limiter, restricts from 95 to 85		9103006	50	1/83



See page 10 & 11 for mounting options

Fast assembly concealed hinge with integrated Silent System

- Sensys 8657i zero protrusion hinge
- Opening angle 165°
- Concealed hinge with clip on installation & integrated Silent System
- Quality classification under EN 15570, Level 3
- For door thickness of 15 – 32 mm
- Cup diameter 35 mm
- Cup depth 11.6 mm
- Integrated +/- 2 mm overlay adjustment
- Integrated depth adjustment + 3 mm / - 2 mm
- Height adjustment at mounting plate
- Opening angle can be reduced by means of optional accessories
- Zero protrusion hinge
- Hinge arm material: steel, nickel plated
- Hinge cup material: steel, nickel plated



Drilling Pattern



Description	Type	Item code	PU	Vol/ Page
Screw on TH 42	Full overlay	9099540	50	1/48
Flash fast assembly TH54 Fits Hettich Machines	Full overlay	9099542	50	1/48
Screw on TH 42	Non Soft close version, Full overlay	9099600	50	1/49
Flash fast assembly TB54 Fits Orange Machines	Full overlay	9099562	50	1/48
Angle limiter, restricts from 165 to 105 or 120		9090756	50	1/83
Angle limiter, restricts from 165 to 90 or 135		9090864	100	1/83
See page 10 & 11 for mounting options				

Fast assembly concealed hinge


- Intermat 9930 with cup in Sensys design for corner cabinet folding doors
- Opening angle 50°/65°



- Concealed hinge with clip on installation
- Quality classification under EN 15570, Level 2
- Cup diameter 35 mm
- Cup depth 12.8 mm
- Diagonal adjustment + 9.5 mm / - 9.5 mm
- Integrated overlay adjustment, see diagram
- For integrated height adjustment, see diagram
- Height adjustment at mounting plate
- Hinge arm material: zinc die-cast nickel plated
- Hinge cup material: steel, nickel plated



Drilling Pattern



Description	Type	Item code	PU	Vol/ Page
Screw on TH 42	Overlay	9090109	50	1/70
See page 10 & 11 for mounting options				

Fast assembly concealed hinge with integrated Silent System


- Sensys 8646i for thin doors
- Opening angle 110°




- Hinge with clip on installation without self closing feature
- For example, for Push to open applications
- Quality classification under EN 15570, Level 3
- For door thickness of 10 – 16 mm
- Cup diameter 35 mm
- Cup depth 7.8 mm
- Integrated +/- 2 mm overlay adjustment
- Integrated depth adjustment + 3 mm / - 2 mm
- Height adjustment at mounting plate
- Hinge arm material: steel, nickel plated
- Hinge cup material: steel, nickel plated
- Note: attachment of the hinge is to be selected depending on the material and quality and is to be assured via a suitable test.



Drilling Pattern



Description	Type	Item code	PU	Vol/ Page
Flash fast assembly TH54 Fits Hettich Machines	Full Overlay	9094276	50	1/44
Screw on TH42	Full Overlay	9094270	50	1/44



Flash fast assembly TB58 Fits Orange Machines	Full Overlay	9094306	50	1/44
See page 10 & 11 for mounting options				

Fast assembly concealed hinge with integrated Silent System



- Sensys 8639i W45
- For 45° face angle applications, opening angle 95°



- Concealed hinge with clip on installation and integrated Silent System
- Quality classification under EN 15570, Level 3
- For diagonal base units, carcass angle 135°
- For door thickness 15 - 28 mm
- Cup diameter 35 mm
- Cup depth 12.8 mm
- Integrated overlay adjustment + 2 mm / - 2 mm
- Integrated depth adjustment + 3 mm / - 2 mm
- Height adjustment at mounting plate
- Hinge arm material: zinc die-cast nickel plated
- Hinge cup material: steel nickel plated



Drilling Pattern




Description	Type	Item code	PU	Vol/ Page
Screw on TH 42	Overlay	9088019	50	1/56
Flash fast assembly TH54 Fits Hettich Machines	Overlay	9088055	50	1/56
Flash fast assembly TB54 Fits Orange Machines	Overlay	9088061	50	1/56
See page 10 & 11 for mounting options				

Fast assembly concealed hinge



- Intermat 9943
- Opening angle 110°



- Concealed hinge with clip on assembly
- Quality classification under EN 15570, Level 3
- For door thickness 15 - 25 mm
- Cup diameter 35 mm
- Cup depth 11.6 mm
- Integrated overlay adjustment + 2 mm / - 2 mm
- Integrated depth adjustment + 2.5 mm / - 1.5 mm
- Height adjustment at mounting plate
- Hinge arm material: steel, nickel plated
- Hinge cup material: steel, nickel plated



Drilling Pattern



Description	Type	Item code	PU	Vol/ Page
Screw on TH 42	Full overlay (48049)	1029518	200	1/112
	Half overlay	48051	50	1/112
	Inset (48052)	1030922	200	1/112
Flash fast assembly TH44 Fits Hettich Machines	Full overlay	48059	50	1/112
	Half overlay	48061	50	1/112
	Inset	48062	50	1/112
Press Fit TB 53 Fits Orange Machines	Full overlay (48056)	1029522	200	1/112
	Half overlay	48057	50	1/112
	Inset	48058	50	1/112
See page 10 & 11 for mounting options				

Special hinge


- Centre hinge
- For folding doors, opening angle 180°



- Centre hinge for folding doors
- For door thicknesses from 15 mm
- Same drilling pattern for door and side element both elements are mounted separately
- The reveal can be infinitely adjusted from minimum reveal to + 4 mm, application is always flush
- Gradual adjustment of the pivot offset with 0 mm, 3 mm and 6 mm
- Zinc die-cast nickel plated

Description	Type	Item code	PU	Vol/ Page
Screw on TH 42	Centre hinge with adjustable offset pivot	46787	10	1/267

Drilling Pattern

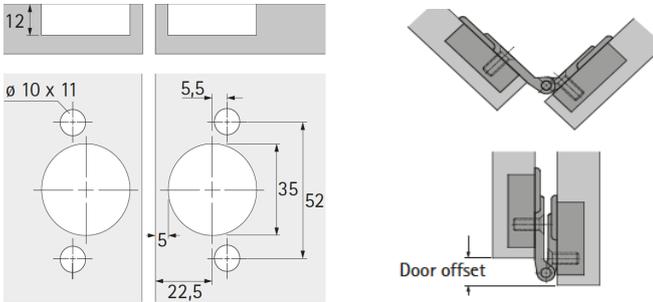

Fast assembly concealed hinge Intermat 9935 for door thicknesses up to 43 mm


- Interimat 9935 for door thicknesses up to 43 mm
- Opening angle 95°



- Concealed hinge with clip on assembly
- Quality classification under EN 15570, Level 2
- For door thickness 16 - 43 mm
- Cup diameter 40 mm
- Cup depth 13.7 mm
- Integrated overlay adjustment + 2 mm / - 2 mm
- Integrated depth adjustment + 2.5 mm / - 1.5 mm
- Height adjustment at mounting plate
- Hinge arm material: zinc die-cast nickel plated
- Hinge cup material: zinc die-cast nickel plated



Drilling Pattern



Description	Type	Item code	PU	Vol/ Page
Screw on TH 42	Full Overlay	73925	10	1/124
See page 10 & 11 for mounting options				

Fast assembly concealed hinge

- Intermat 9936 W90
- For 90° face angle applications, opening angle 95°




- Concealed hinge with clip on assembly
- Quality classification under EN 15570, Level 2
- For 90° carcass angle
- For door thickness 14 - 28 mm
- Cup diameter 35 mm
- Cup depth 11.1 mm (Fix 11.6 mm)
- Integrated adjustment of door offset + 2 mm / - 2 mm
- Integrated reveal adjustment + 2 mm / - 2 mm
- Height adjustment at mounting plate
- Hinge arm material: zinc die-cast nickel plated
- Hinge cup material: steel, nickel plated

full overlay



Drilling Pattern



Description	Type	Item code	PU	Vol/ Page
Screw on TH 42	Inset	77708	50	1/148
See page 10 & 11 for mounting options				

Fast assembly concealed hinge

- Intermat 9936 W45
- For 45° face angle applications, opening angle 95°




- Concealed hinge with clip on assembly
- Quality classification under EN 15570, Level 2
- For 45° carcass angle
- For door thickness 14 - 32 mm
- Cup diameter 35 mm
- Cup depth 11.1 mm (Fix 11.6 mm)
- Integrated overlay adjustment + 2 mm / - 2 mm
- Integrated depth adjustment + 2 mm / - 2 mm
- Height adjustment at mounting plate
- Hinge arm material: zinc die-cast nickel plated
- Hinge cup material: steel, nickel plated

overlay



Drilling Pattern



Description	Type	Item code	PU	Vol/ Page
Screw on TH 42	Full Overlay	48096	50	1/140
See page 10 & 11 for mounting options				

Fast assembly concealed hinge without self closing feature - For Push to Open


- Intermat 9973
- Opening angle 110°



- Hinge with clip on assembly without self closing feature
- For example, for Push to open applications
- Quality classification under EN 15570, Level 3
- For door thickness 15 - 25 mm
- Cup diameter 35 mm
- Cup depth 11.6 mm
- Integrated overlay adjustment + 2 mm / - 2 mm
- Integrated depth adjustment + 2.5 mm / - 1.5 mm
- Height adjustment at mounting plate
- Hinge arm material: steel, nickel plated
- Hinge cup material: steel, nickel plated



Drilling Pattern



Description	Type	Item code	PU	Vol/ Page
Screw on TH 42	Full Overlay	9043361	50	1/114
Screw on TH 42	Inset	9043363	50	1/114
See page 10 & 11 for mounting options				

Push to open opening system for handleless furniture fronts

- Push to open Magnet for drilling in



- For full overlay doors
- Large adjustment range of 6 mm
- Opening movement 1.4 mm
- For using short stroke / long stroke options, see „Application areas / recommended applications“, see pages 208 - 209
- For installation, see installation notes, see pages 221 - 223
- Plastic


- Push to open Magnet Designer adapter




- High quality designer adapter for upgrading furniture range
- For combination with all Push to open drill in versions
- Push to open drill in version must be ordered separately
- Suitable for full overlay, half overlay and inset doors
- Attachment housing material: plastic, anthracite
- Housing material: zinc die-cast nickel plated

Description	Type	Item code	PU	Vol/ Page
Anthracite Push to open magnet for drilling in. Long stroke	For use with unsprung hinges as above	9089632	25	1/215
Anthracite Push to open magnet for drilling in. Long stroke	For use with sprung hinges	9089638	25	1/213
Anthracite Push to open magnet for drilling in.	Screw on	9089633	25	1/218

Drilling Pattern for short stroke, overlay door

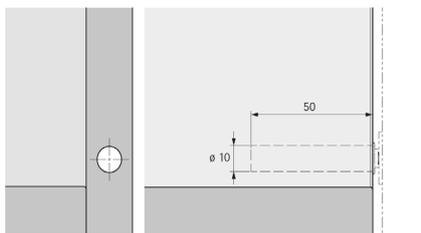


Drilling Pattern for long stroke, overlay door

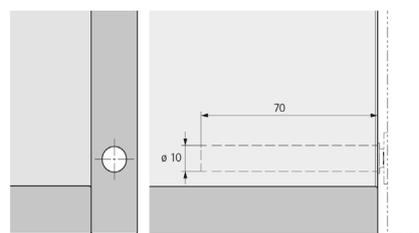

BlueMax Mini



Drilling Pattern

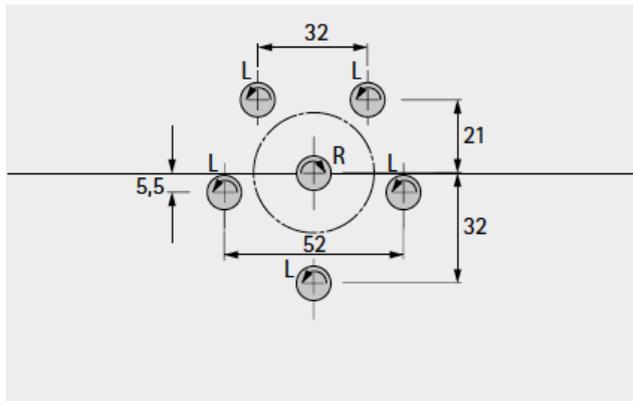

Compact power drill with hand lever

- Drilling unit with 6 drilling spindles
- Fence with work bench
- 1 set of drill bits (1 x \varnothing 35 mm clockwise, 2 x \varnothing 10 mm anticlockwise)
- 2 pendulum stops
- Please order drill bits separately


Page reference:

- For accessories, see page 1149
- For drill bits, see pages 1151 - 1152

Description	Item code	PU	Vol/ Page
Compact power drill with hand lever	42222	1	2/1148

Mounting Plates


Cross Mounting plate with premounted Euro Screws



- ▷ For ø 5 x 12 mm drilling's
- ▷ Quality classification under EN 15570, Level 3
- ▷ Hole spacing 32 mm
- ▷ Oblong hole height adjustment ± 3mm
- ▷ Steel, nickel plated

Distance	Description	Type	Item code	PU	Vol/ Page
0mm (18mm Carcase)	Single part	Euro screw	9075055	50	1/75
0mm (18mm Carcase)	Single part	Euro screw	9071625	200	1/75
3mm (For Inset)	Single part	Euro screw	9075057	50	1/75
3mm (For Inset)	Single part	Euro screw	9071627	200	1/75


Cross Mounting plate with premounted Euro Screws



- ▷ For ø 5 x 12 mm drilling's
- ▷ Quality classification under EN 15570, Level 3
- ▷ Hole spacing 32 mm
- ▷ Oblong hole height adjustment ± 2mm
- ▷ Steel, nickel plated

Distance	Description	Type	Item code	PU	Vol/ Page
0mm (18mm Carcase)	2 part adjustable	Euro screw	9075080	50	1/78
0mm (18mm Carcase)	2 part adjustable	Euro screw	9071665	200	1/78
3mm (For Inset)	2 part adjustable	Euro screw	9075082	50	1/78
3mm (For Inset)	2 part adjustable	Euro screw	9071667	200	1/78


Cross Mounting plate with expanding sockets and special screws



- ▷ For ø 5 x 12 mm drilling's
- ▷ Quality classification under EN 15570, Level 3
- ▷ Hole spacing 32 mm
- ▷ Oblong hole height adjustment ± 2mm
- ▷ Steel, nickel plated

Distance	Description	Type	Item code	PU	Vol/ Page
0mm (18mm Carcase)	2 part adjustable	Expanding dowel	9075070	50	1/77
0mm (18mm Carcase)	2 part adjustable	Expanding dowel	9071655	200	1/77
3mm (For Inset)	2 part adjustable	Expanding dowel	9075072	50	1/77
3mm (For Inset)	2 part adjustable	Expanding dowel	9071657	200	1/77


Cross Mounting plate with premounted chipboard screws



- ▷ For drilling's max. \varnothing 2.5 mm
- ▷ Quality classification under EN 15570, Level 3
- ▷ Hole spacing 32 mm
- ▷ Oblong hole height adjustment \pm 2mm
- ▷ Steel, nickel plated

Distance	Description	Type	Item code	PU	Vol/ Page
0mm (18mm Carcase)	2 part adjustable	Chipboard screw	9075085	50	1/78
0mm (18mm Carcase)	2 part adjustable	Chipboard screw	9071670	200	1/78
3mm (For Inset)	2 part adjustable	Chipboard screw	9075087	50	1/78
3mm (For Inset)	2 part adjustable	Chipboard screw	9071672	200	1/78


Press in linear mounting plate



- ▷ For 3.5mm \varnothing 16 mm countersunk screws
- ▷ Quality classification under EN 15570, Level 3
- ▷ Eccentric cam height adjustment \pm 2 mm
- ▷ Steel, nickel plated

Distance	Description	Type	Item code	PU	Vol/ Page
20mm hole distance	Screw on	1.5mm	9075095	50	1/79
20mm hole distance	Knock in	1.5mm	9075098	50	1/79

Cross Mounting plate for screwing on



- ▷ For 4.5mm \varnothing x 16 mm countersunk screws
- ▷ Quality classification under EN 15570, Level 3
- ▷ Hole spacing 32 mm
- ▷ Oblong hole height adjustment \pm 3mm
- ▷ Steel, nickel plated

Distance	Description	Type	Item code	PU	Vol/ Page
0.0mm hole distance	Single part	Euro screw	9071575	200	1/74
3.0mm hole distance	Single part	Euro screw	9071577	200	1/74

Drawers and Runners

InnoTech double walled drawer systems - Component form 470mm



Full extension
Soft close
30 kg load capacity
Minimum carcass depth 485mm
Silver

Sets contains:	470mm Drawer sides
	470mm Runners
	Timber back connectors or steel backs
	Front connectors
	Cover caps
	Pot rails and connectors (Pot drawers only)

Item Code	Description
Drawers with timber back connectors - Requires timber base & back	
60-drawerstd	Drawer set 70mm
60-drawerpp	Drawer set 144mm (Pot)
Drawers with steel backs - Requires timber base only	
60-COM300STD	Standard Height Silver 300mm Carcase
60-COM400STD	Standard Height Silver 400mm Carcase
60-COM450STD	Standard Height Silver 450mm Carcase
60-COM500STD	Standard Height Silver 500mm Carcase
60-COM600STD	Standard Height Silver 600mm Carcase
60-COM700STD	Standard Height Silver 700mm Carcase
60-COM800STD	Standard Height Silver 800mm Carcase
60-COM900STD	Standard Height Silver 900mm Carcase
60-COM1000STD	Standard Height Silver 1000mm Carcase
60-COM1200STD	Standard Height Silver 1200mm Carcase
60-COM300PP	Pot Height Silver 300mm Carcase
60-COM400PP	Pot Height Silver 400mm Carcase
60-COM450PP	Pot Height Silver 450mm Carcase
60-COM500PP	Pot Height Silver 500mm Carcase
60-COM600PP	Pot Height Silver 600mm Carcase
60-COM700PP	Pot Height Silver 700mm Carcase
60-COM800PP	Pot Height Silver 800mm Carcase
60-COM900PP	Pot Height Silver 900mm Carcase
60-COM1000PP	Pot Height Silver 1000mm Carcase
60-COM1200PP	Pot Height Silver 1200mm Carcase

Other sizes: 260, 350, 420, 520, 620 available to order (lead times will apply)

InnoTech double walled drawer systems - Pre Assembled 470mm



Full Extension
30 Kg Load Capacity
Soft close
Minimum carcass depth
485mm
Complete ready to install

Other sizes:

260, 350, 420, 520, 620 available to order (lead times will apply)

Item code	Description
Standard Height 470 Drawer sets	
60-300STD	70mm Drawer for 300mm Carcase
60-400STD	70mm Drawer for 400mm Carcase
60-450STD	70mm Drawer for 450mm Carcase
60-500STD	70mm Drawer for 500mm Carcase
60-600STD	70mm Drawer for 600mm Carcase
60-700STD	70mm Drawer for 700mm Carcase
60-800STD	70mm Drawer for 800mm Carcase
60-900STD	70mm Drawer for 900mm Carcase
60-1000STD	70mm Drawer for 1000mm Carcase
60-1200STD	70mm Drawer for 1200mm Carcase
Pot Height 470 Drawer sets	
60-300PP	144mm Drawer for 300mm Carcase
60-400PP	144mm Drawer for 400mm Carcase
60-450PP	144mm Drawer for 450mm Carcase
60-500PP	144mm Drawer for 500mm Carcase
60-600PP	144mm Drawer for 600mm Carcase
60-700PP	144mm Drawer for 700mm Carcase
60-800PP	144mm Drawer for 800mm Carcase
60-900PP	144mm Drawer for 900mm Carcase
60-1000PP	144mm Drawer for 1000mm Carcase
60-1200PP	144mm Drawer for 1200mm Carcase

All drawers are made to order - please allow up to 3 working days for delivery

InnoTech Pre Assembled Pantry Drawers



Item Code	Description
Standard Height 470 Drawer Set	
60-400Pantry	70mm Drawer for 400mm Carcase
60-500Pantry	70mm Drawer for 500mm Carcase
60-600Pantry	70mm Drawer for 600mm Carcase
Pot Height 470 Drawer sets	
60-400PPantry	144mm Drawer for 400mm Carcase
60-500PPantry	144mm Drawer for 500mm Carcase
60-600PPantry	144mm Drawer for 600mm Carcase



ArciTech Drawer sets - Anthracite Component form



Sets contains:	Item code	
		450mm Anthracite sides
	65-DRAWERSTD	450mm Acto full extension runners 40Kg
		94mm rear panel connectors
		Front connectors for drawer cap
		Cover caps
		Requires timber base & back

Many other options are available for these drawers. Please refer to volume 1 page 616 for further options including steel backs, internal fronts, glass sides and more

ArciTech Drawer sets - Anthracite Component form

ArciTech double walled drawer system

- ▷ Pot-and-pan drawer / internal pot-and-pan drawer, height 186 mm, drawer-side profile height 94 mm
- ▷ Powder coated steel, anthracite



Sets contains:	Item code	
		450mm Anthracite sides
	65-DRAWERPP	450mm Acto full extension runners 40Kg
		186mm rear panel connectors
		Front connectors for drawer cap
		Cover caps
		450mm Pot rails
		Rail connectors
		Requires timber base and back

Many other options are available for these drawers. Please refer to volume 1 page 616 for further options including steel backs, internal fronts, glass sides and more


Quadro V6 full extension concealed runners with soft close. 30kg load Capacity



- Silent System - the integrated Silent System closes the drawer quietly and gently
- Convenient slide on installation with catches and tool-less height adjustment
- Load capacity to EN 15338, Level 3
- Galvanised steel, suitable for rooms exposed to moisture



Item code	Drawer runner length mm	Min carcass depth	PU	Vol / Page
9117491	250	263	20	1/1566
9080224	280	293	20	1/1566
9080225	300	313	20	1/1566
9080226	320	333	20	1/1566
9080231	350	363	20	1/1566
9080232	380	393	20	1/1566
9080233	400	413	20	1/1566
9080234	420	433	20	1/1566
9080235	450	463	20	1/1566
9080236	480	493	20	1/1566
9080237	500	513	20	1/1566
9080238	520	533	20	1/1566
9080239	550	563	20	1/1566
9080240	580	593	20	1/1566
9080241	600	613	20	1/1566
	Catches ordered separately		100	1/1566
9144830	Catch for wooden drawers left		100	1/1566
9144841	Catch for wooden drawers right		100	1/1566

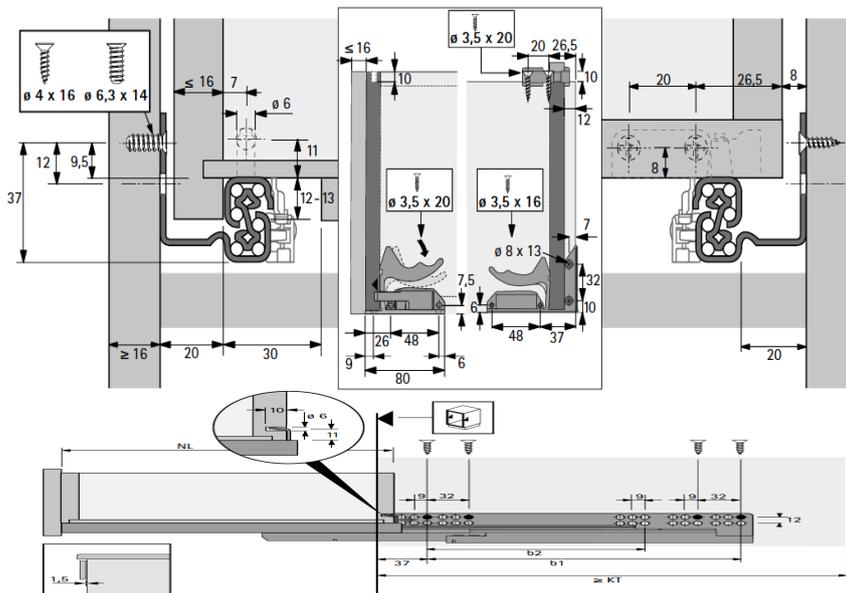

Quadro V6 full extension concealed runners with soft close. 30kg load Capacity 4D way adjustment



- Silent System - the integrated Silent System closes the drawer quietly and gently
- Convenient slide on installation with 4D catch and tilt adjuster
- Tool-less, intuitive height adjustment up to + 2 mm, side adjustment up to +/- 1.5 mm
- Depth adjustment up to + 4 mm and tilt adjustment
- Load capacity to EN 15338, Level 3
- Galvanised steel, suitable for rooms exposed to moisture


Set comprises:

- 1 drawer runner, left and right
- 1 catch, left and right
- 1 tilt adjuster, left and right




Item code	Drawer runner length mm	Min carcass depth	PU	Vol / Page
9181288	250	263	1	1/1570
9181289	280	293	1	1/1570
9181290	300	313	1	1/1570
9181291	320	333	1	1/1570
9181292	350	363	1	1/1570
9181293	380	393	1	1/1570
9181294	400	413	1	1/1570
9181295	420	433	1	1/1570
9181296	450	463	1	1/1570
9181297	480	493	1	1/1570
9181298	500	513	1	1/1570
9181299	520	533	1	1/1570
9181300	550	563	1	1/1570
9181301	580	593	1	1/1570
9181302	600	613	1	1/1570

Planning dimensions

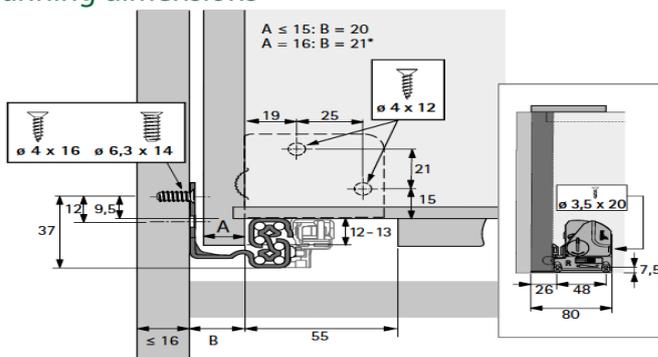

Planning dimensions

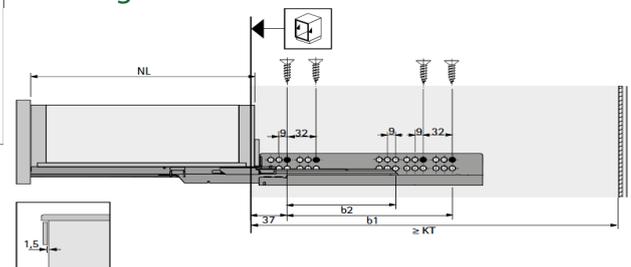

KA 5332 Full extension runner for side installation. 30 kg




- Precision full extension runner with pull-out stop and roll-out prevention
- A release lever makes the drawer easy to remove and reinstall
- Precision control for moving smoothly and freely and high lateral stability
- For drawers with grooved, rebated or loosely fitted drawer bottom panel
- Load capacity to EN 15338, Level 1
- Galvanised steel, blue passivated



Item code	Drawer length mm	Min depth mm	PU	Vol / Page
9070496	KA 5332 30kg 250	254	10	1/1603
9070498	KA 5332 30kg 300	304	10	1/1603
9057402	KA 5332 30kg 350	354	10	1/1603
9057403	KA 5332 30kg 400	404	10	1/1603
9057404	KA 5332 30kg 450	454	10	1/1603
9057405	KA 5332 30kg 500	504	10	1/1603
9057407	KA 5332 30kg 550	554	10	1/1603
73283	KA 5632 45kg 600	604	10	1/1602
73284	KA 5632 45kg 650	654	10	1/1602
41355	KA 5632 45kg 700	704	10	1/1602


Planning dimensions

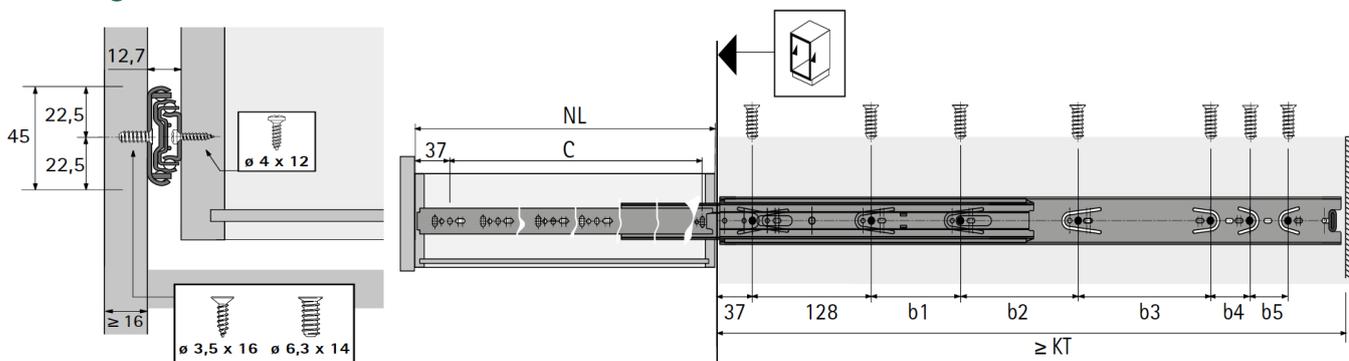

Innowood Drawers



- Ready to assemble timber drawers
- Quadro soft close part extension runners
- For 500, 800, 900 and 1000 mm carcases
- Drawer front 150 mm high
- Colour: Cream

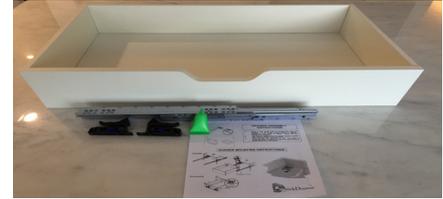

Item code	Description	PU
KA0340	500mm Innowood	1
KA0342	800mm Innowood	1
KA0344	900mm Innowood	1
KA0346	1000mm Innowood	1

Innorobe Drawers



- Ready to assemble timber drawers (flat packed)
- Quadro soft close part extension runners
- For 900 mm carcasse
- Height 180 mm
- Colour: Cream
- Attach your own drawer front




Item code	Description	PU
KA0360	900mm Innorobe	1

Drawer Components

Innotech Atira drawer components (Bulk buying)

Standard height drawer components (Cutlery drawer)

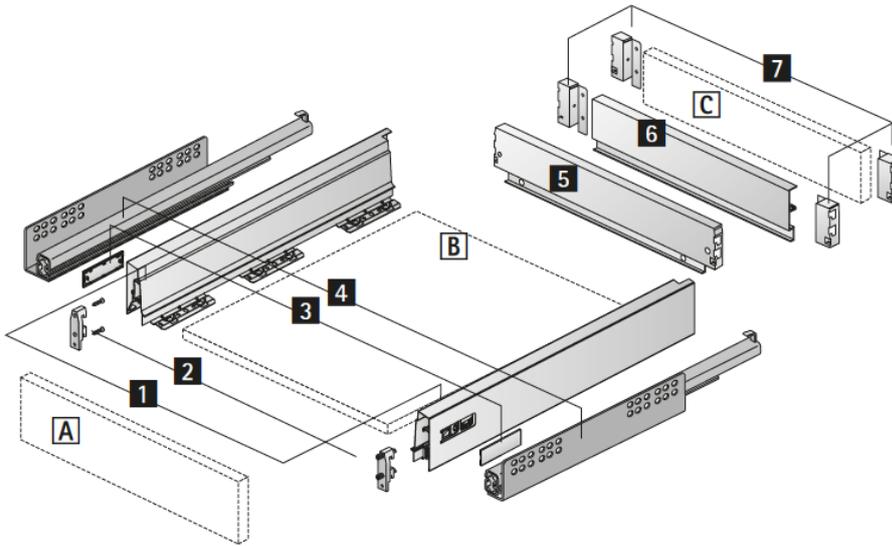

- 1 Drawer side profile, left and right
- 2 Drawer front connector for drawer side profile, 2 each
- 3 Cover cap, 2 each
- 4 Quadro drawer runner, left and right, see page 1341
- 5 Steel rear Panel

Alternatively:

- 6 Aluminium rear panel or C Wooden rear panel and
- 7 Rear panel connector, left and right
- A Front panel
- B Bottom panel (material thickness 16 mm)
- C Wooden rear panel (material thickness 16 mm)

Drawer Components - Innotech



Item code	Description	PU	Vol/Page
9194390	260mm Silver drawer side left	18	1/1042
9194391	260mm Silver drawer side right	18	1/1042
9194398	470mm Silver drawer side left	18	1/1042
9194399	470mm Silver drawer side right	18	1/1042
1065191	Drawer front connector screw on	400	1/1042
1061450	Drawer front connector knock in	400	1/1042
9194646	Cover cap, Grey with Hettich logo	300	1/1042
9047392	260mm Quadro runner left	20	1/1348
9047393	260mm Quadro runner right	20	1/1348
9047452	470mm Quadro runner left	20	1/1348
9047453	470mm Quadro runner right	20	1/1348

Drawer Components - Innotech



Item code	Description	PU	Vol/Page
9004059	275mm Carcase	20	1/1053
9004065	300mm Carcase	20	1/1053
9004067	350mm Carcase	20	1/1053
9004068	400mm Carcase	20	1/1053
9004069	450mm Carcase	20	1/1053
9004070	500mm Carcase	20	1/1053
9004071	550mm Carcase	20	1/1053
9004072	600mm Carcase	20	1/1053
9004073	700mm Carcase	10	1/1053
9004074	800mm Carcase	10	1/1053
9004075	900mm Carcase	10	1/1053
9004076	1000mm Carcase	10	1/1053
9004077	1200mm Carcase	10	1/1053
70mm back panels (Cutlery drawers)			
1061900	275mm Carcass	40	1/1040
1061901	300mm Carcass	40	1/1040
1061902	350mm Carcass	40	1/1040
1061903	400mm Carcass	40	1/1040
1061904	450mm Carcass	40	1/1040
1061905	500mm Carcass	40	1/1040
1061906	550mm Carcass	40	1/1040
1061907	600mm Carcass	40	1/1040
1063664	700mm Carcass	20	1/1040
1062960	800mm Carcass	20	1/1040
1062961	900mm Carcass	20	1/1040
1063667	1000mm Carcass	20	1/1040
9004102	1200mm Carcass	20	1/1040
70mm Back panel connector Left			
1062501	70mm Back panel connector Left	40	1/1042
70mm Back panel connector Right			
1062502	70mm Back panel connector Right	40	1/1042
144mm Back panel connector Left			
9007355	144mm Back panel connector Left	40	1/1056
144mm Back panel connector Right			
9007356	144mm Back panel connector Right	40	1/1056
260mm pot rail left			
9194522	260mm pot rail left	80	1/1055
260mm pot rail right			
9194523	260mm pot rail right	80	1/1055
470mm pot rail left			
9194530	470mm pot rail left	80	1/1055
470mm pot rail right			
9194531	470mm pot rail right	80	1/1055
Pot rail connector			
9002503	Pot rail connector	400	1/1055

InnoTech Atira double walled drawer system

- Internal pot-and-pan drawer front with railing, height 144 mm
- Silver

Item code	Description	PU	Vol / Page
	Front Panel for internal pot-and-pan drawer		
9194719	300mm carcass	1	1/1047
9194720	400mm carcass	1	1/1047
9194721	500mm carcass	1	1/1047
9194722	600mm carcass	1	1/1047
9194723	700mm carcass	1	1/1047
9194724	800mm carcass	1	1/1047
9194725	900mm carcass	1	1/1047
9194726	1000mm carcass	1	1/1047
9194727	1200mm carcass	1	1/1047



InnoTech Atira double walled drawer system

- Internal drawer front, height 70 mm
- Powder coated steel, silver

9194770	300mm carcass	1	1/1069
9194771	400mm carcass	1	1/1069
9194772	500mm carcass	1	1/1069
9194773	600mm carcass	1	1/1069
9194774	700mm carcass	1	1/1069
9194775	800mm carcass	1	1/1069
9194776	900mm carcass	1	1/1069
9194777	1000mm carcass	1	1/1069
9194778	1200mm carcass	1	1/1069



Inserts for Innotech

Made to fit inside 470mm Silver or white Innotech drawers
Anthracite plastic tray



**Insert may differ from image

Item code	Description	PU
KAMOVEATIRA300	500mm carcass Anthracite (for silver drawer)	1
KAMOVEATIRA400	500mm carcass Anthracite (for silver drawer)	1
KAMOVEATIRA500	500mm carcass Anthracite (for silver drawer)	1
KAMOVEATIRA600	600mm carcass Anthracite (for silver drawer)	1
KAMOVEATIRA800	800mm carcass Anthracite (for silver drawer)	1
KAMOVEATIRA900	900mm carcass Anthracite (for silver drawer)	1
KA4885	300mm carcass White	1
KA4886	400mm carcass White	1
KA4887	500mm carcass White	1
KA4888	600mm carcass White	1
KA4889	800mm carcass White	1
KA4890	900mm carcass White	1
KA4891	1000mm carcass White	1

Inserts for Innotech


Made to fit inside 470mm Silver or white Innotech drawers

- Premounted steel cutlery tray
- Suitable for variable width use in carcases in widths of 450 mm and over
- 2 can be fitted in carcase widths of 800 mm and over
- Anti slip mat must be ordered separately




Item code	Description	PU	Vol / Page
9194881	Steel cutlery tray	1	1/1120
KAMATIRA500	Antislip mat for 500mm carcase	1	
KAMATIRA600	Antislip mat for 600mm carcase	1	
KAMATIRA800	Antislip mat for 800mm carcase	1	
KAMATIRA900	Antislip mat for 900mm carcase	1	

Partitioning



Dimensional drawing

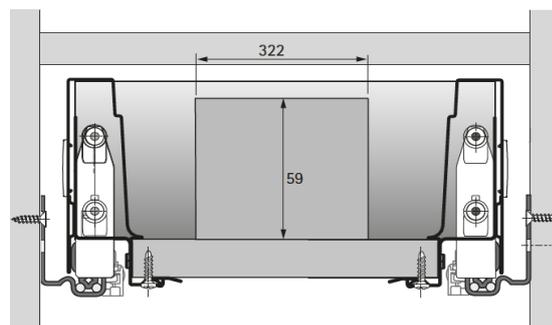

Inserts for Arcitech Drawers

Made to fit inside 450mm Anthracite Arcitech drawers
Anthracite plastic tray



**Insert may differ from image


Item code	Description	PU
KAMOVE500/500	500mm carcase	1
KAMOVE500/600	600mm carcase	1
KAMOVE450/900	900mm carcase	1

Sliding and Folding

Wingline 770 Bi fold system



- For 1 folding door with 2 wings
- Overlay door position
- For wooden doors
- Suitable for use with Sensys hinge with Silent System
- Door wing weight up to 20 kg
- Door height up to 2200 mm
- Door wing width up to 500 mm
- With WingLine 26 as bottom guide
- Tested with 40000 cycles



Item code	Description	PU	Vol/Page
070968	Left door kit	1	2/342
070969	Right door kit	1	2/342
Order Tracks separately as below			



1079089	2000mm Top profile	1	2/342
72919	2000mm Lower guide profile	1	2/342

Sliding and Folding

Wingline 780 Bi fold system



- For 1 folding door with 2 wings
- Overlay door position
- For wooden doors
- Suitable for use with Sensys hinge with Silent System
- Door wing weight up to 10 kg
- Door height up to 900 mm
- Door wing width up to 500 mm
- Tested with 40000 cycles



Item code	Description	PU	Vol/Page
9080212	Left door kit	1	2/350
9080213	Right door kit	1	2/350
Order Track separately as below			



1079089	2000mm Top profile	1	2/342
---------	--------------------	---	-------

Sliding and Folding

Bi fold 77 system

Fantastic flexibility. With Wing 77, you can produce cabinet front panels with two door wings (no more than 25 kg each) or four door wings (no more than 20 kg each).


The clever part: the entire door set is free moving! Door sets can also be interlinked. Surprise your customers with individually tailored folding door solutions for the bedroom or office. Wing 77 gives you the design flexibility to do so.




Performance Summary

- Folding door system with 2 or 4 door wings
- Overlay door position
- For wooden doors
- Door wing weight up to 20 kg (25 kg) with 4 (2) door wings
- Door height up to 2400 mm
- Door wing width up to 400 mm (500 mm) with 4 (2) door wings
- Height adjustment +/- 3 mm
- Centre panels recessed 40 mm
- Tested with 40000 cycles


Door material

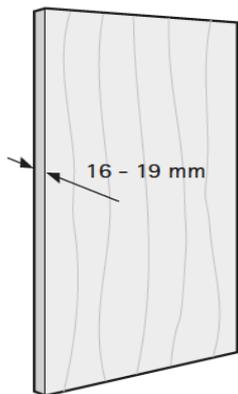

Door size and door weight

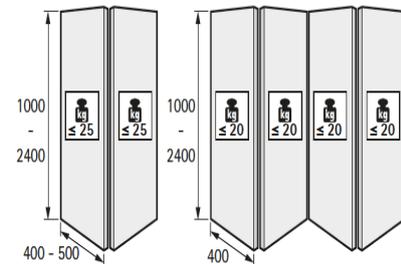

Number of door wings and door position

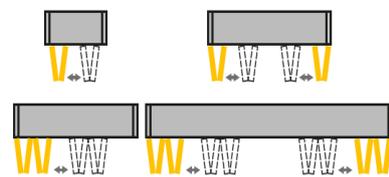

Sliding and Folding

Bi fold 77 system

- Set contains all the parts required for 1 folding sliding door with 4 wings
- The inside carcass width of 800 mm should not be exceeded. The top panel must be designed so that it cannot sag by more than 1.5 mm under the weight of the folded doors.

Set comprises:

- 4 tandem running components for fast installation
- 4 supports for running component with + / - 5 mm height adjustment
- 1 spacer spindle for tandem running component
- 3 guide components and centre guide component
- 2 latch plates
- 8 clip on centre hinges
- 4 spacers
- 4 end stops
- 8 noise absorbing felts (to buffer doors against the carcass) for positioning at the top and bottom on each door wing
- Fixing material

Advice:

- Please order profiles separately (see page 377)



Item code	Description	PU	Vol/Page
70987	4 panel set	1	2/376
70985	Wing 77 guide profile 3200mm	4	2/377
9193574	Wing 77 runner profile 3200mm	4	2/377

Sliding System up to 35kgs

Topline M with or without Soft Close

Sliding door system / top running

- ▷ **TopLine M** / overlay door position
- ▷ System components / 2-door


Technical details in brief

- 2-track, top running sliding door system
- Overlay door position
- For wooden doors
- Door weight up to 35 kg
- Door height up to 2300 mm
- Door width 500 - 1250 mm
- Door thicknesses 15, 16, 18, 19 mm
- 2 opening versions: fully flush or offset when using projecting handles
- Tested to EN 15706, Level 2



For full specifications and installation dimensions see page 132 Volume 2

STB 16.1 set. for guide system in front of the bottom panel

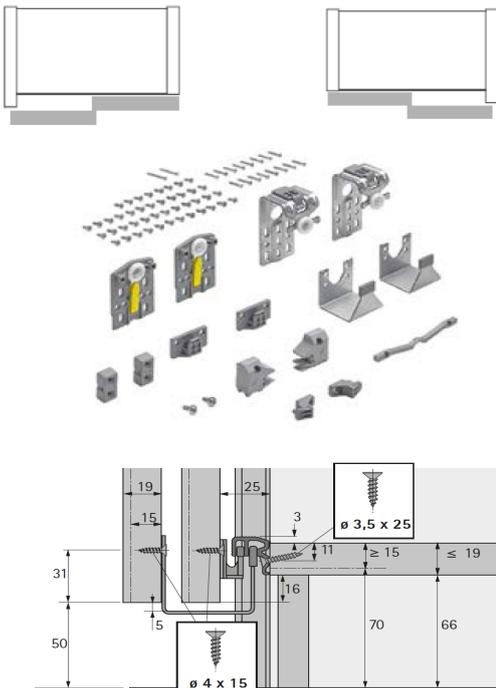

STB 16.1

- Offset opening for applications with door handles or finger pulls (door offset: 58 mm)
- Flush opening for handleless applications and when using internal drawers (door offset: 0 mm)
- Running components with integrated lift off guard
- Package contains all the fitting parts required for an entire 2-door cabinet
- For door thicknesses of maximum 19 mm (EB 29)

Set comprises:

- 2 running components for one front most door
- 2 running components for one rear most door
- 2 guide components for one front most door
- 2 guide components for one rear most door
- 2 support blocks for the runner profile
- 2 end stops for the runner profile
- 1 spacer for offset

Item code	Description	PU	Vol/Page
9133612	2 door standard set for STB 16.1	1	2/136
9144901	2 door soft close - offset open only * optional*	1	2/137
9117426	3000mm Runner Profile	1	2/140
9131837	3000mm STB 16.1 guide profile	1	2/141


Sliding System up to 35kgs

TopLine M with or without Soft Close

Sliding door system / top running


- ▷ **TopLine M** / overlay door position
- ▷ System components / 3-door

STB 16.1 set, for guide system in front of the bottom panel

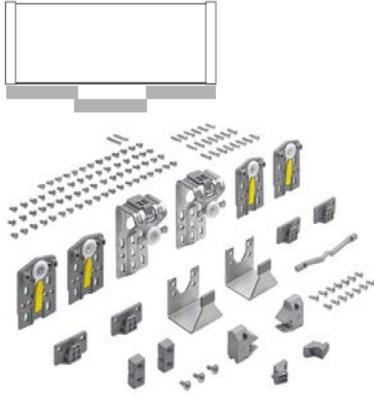

- Offset opening for applications with door handles or finger pulls (door offset: 58 mm)
- Flush opening for handleless applications and when using internal drawers (door offset: 0 mm)
- Running components with integrated lift off guard
- Package contains all the fitting components required for an entire 3-door cabinet
- For door thicknesses of maximum 19 mm (EB 29)
- Set comprises:
 - 2 running components for one front most door
 - 4 running components for two rear most doors
 - 2 guide components for one front most door
 - 4 guide components for two rear most doors
 - 2 support blocks for the runner profile
 - 2 end stops for the runner profile
 - 1 spacer for offset opening
 - Fixing material

Item code	Description	PU	Vol/Page
9129577	3 door standard set for STB 16.1	1	2/138
9144902	3 door soft close - offset open only * optional*	1	2/139
9117426	3000mm Runner Profile	1	2/140
9131837	3000mm STB 16.1 guide profile	1	2/141

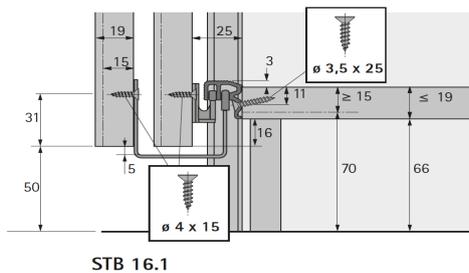

Sliding System up to 50kgs

Topline L

Sliding door system / top running

▷ **TopLine L** / overlay door position / door movement in front of top panel






Technical details in brief

- 2-track, top running sliding door system
- Overlay door position
- For wooden doors or wood / aluminium framed doors
- Door weight up to 50 kg
- Door height up to 2600 mm
- Door width 700 - 1500 mm
- Door thicknesses 16, 18, 19, 21, 22, 25, 40 mm
- Height adjustment +/- 3 mm
- Door opening options: fully overlapping or offset when using projecting handles
- Fast installation of guide components
- Silent System in opening and closing direction
- Tested to DIN EN 15706, Level 3


All stocked sets are based on 18/19mm door thicknesses. For thicker doors alternative kits are available Ex-Germany. Please see page 74 and on in Volume 2 of the Hettich Catalogue.

Operating principle / installation dimensions


X	Y	EB
16	12	28
18	13	31
19	12	31
21	13	34
22	12	34
25	12	37
40	12	52

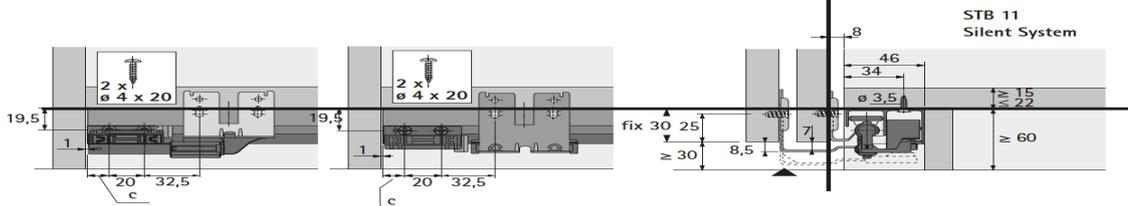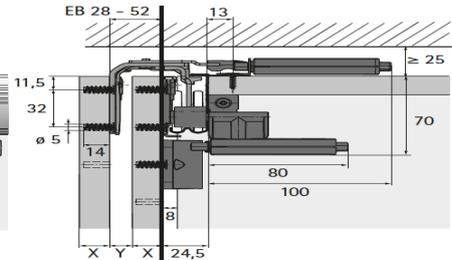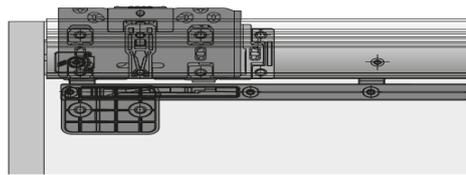

1 Operating principle / flush opening

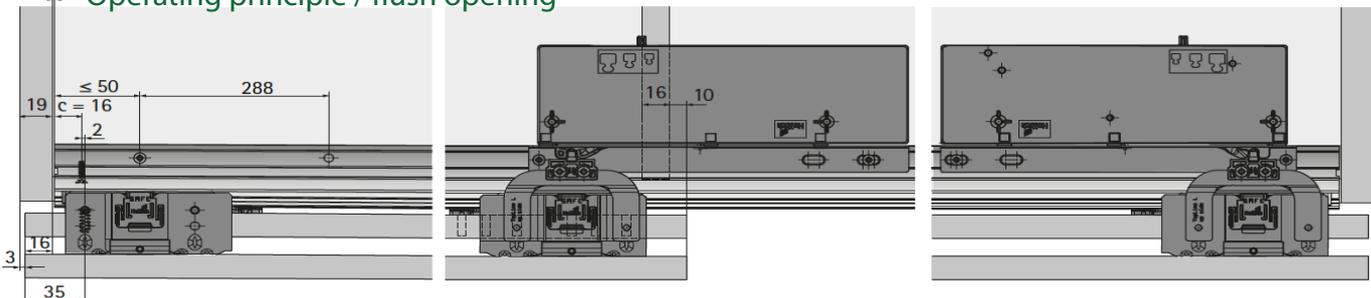

Operating principle / offset opening

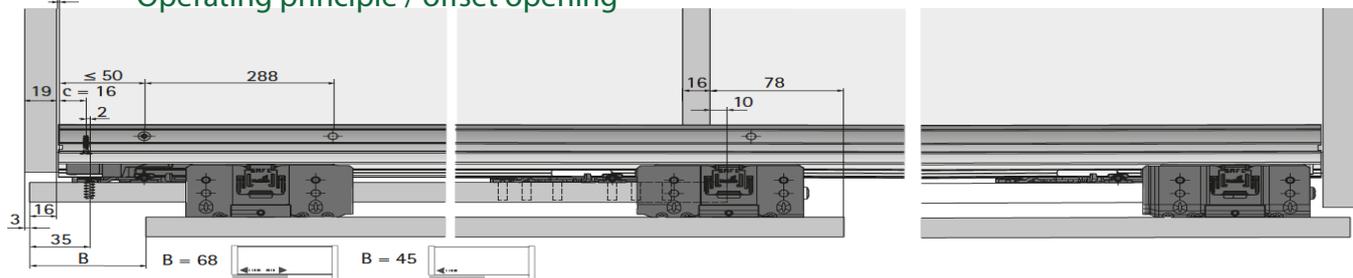

Sliding System up to 50kgs

Topline L 2 Door sets

2 Door: Front door left.
45mm offset for doors with handles



2 Door: Front door left. Flush opening for handleless & Internal drawer



2 Door: Front door right.
45mm offset for doors with handles



2 Door: Front door right. Flush opening for handleless & Internal



Item code	Description	PU	Vol/Page
9206500	Front door set for 19mm thick	1	2/78
9206506	Rear door set for offset opening	1	2/78
9206309	Accessory set for offset opening	1	2/79
71111	3000mm top runner profile	1	2/90
71117	3000mm lower guide profile	1	2/91
Optional upgrades			
9169651	2 door soft close set		2/80
9169367	2 door soft opening set		2/80
9199769	Soft guiding lower set for heavy doors		2/81
Basic Set			
9206500	Front door set for 19mm thick	1	2/78
9206508	Rear door set for flush opening	1	2/79
9206311	Accessory set for flush opening	1	2/78
71111	3000mm top runner profile	1	2/90
71117	3000mm lower guide profile	1	2/91
Optional upgrades			
9169654	2 door soft close set	1	2/80
9169638	2 door soft opening set	1	2/81
9199769	Soft guiding lower set for heavy doors	1	2/81
Basic Set			
9206500	Front door set for 19mm thick	1	2/82
9206505	Rear door set for offset opening	1	2/82
9206309	Accessory set for offset opening	1	2/83
71111	3000mm top runner profile	1	2/90
71117	3000mm lower guide profile	1	2/91
Optional upgrades			
9169651	2 door soft close set	1	2/84
9169367	2 door soft opening set	1	2/84
9199769	Soft guiding lower set for heavy doors	1	2/81
Basic Set			
9206500	Front door set for 19mm thick	1	2/82
9206508	Rear door set for Flush opening	1	2/83
9206311	Accessory set for flush opening	1	2/83
71111	3000mm top runner profile	1	2/90
71117	3000mm lower guide profile	1	2/91
Optional upgrades			
9169655	2 door soft close set	1	2/84
9169640	2 door soft opening set	1	2/84
9199769	Soft guiding lower set for heavy doors	1	2/81

Sliding System up to 50kgs

Topline L 3 Door sets

3 Door: 45mm offset for doors with handles



Item code	Description	PU	Vol/Page
9206500	Front door set for 19mm thick	1	2/86
9206505	Left Rear door set for offset opening	1	2/86
9206506	Right Rear door set for offset opening	1	2/86
9206310	Accessory set for offset opening	1	2/87
71111	3000mm top runner profile	1	2/90
71117	3000mm lower guide profile	1	2/91
Optional upgrades			
9140438	Soft close for center door	1	2/88
9169653	Soft close set for rear doors	1	2/88
9169656	Soft opening set	1	2/88
9199769	Soft guiding lower set for heavy doors	1	2/89

3 Door: Flush opening for handleless & internal drawer options



Basic Set			
9206500	Front door set for 19mm thick	1	2/86
9206508	Rear door set for flush opening	1	2/87
9206508	Rear door set for flush opening	1	2/87
9206313	Accessory set for flush opening	1	2/87
71111	3000mm top runner profile	1	2/90
71117	3000mm lower guide profile	1	2/91
Optional upgrades			
9140438	Soft close for center door	1	2/88
9169653	Soft close set for rear doors	1	2/88
9169656	Soft opening set	1	2/88
9199769	Soft guiding lower set for heavy doors	1	2/89

Topline L 4 Door sets*

4 Door: 45mm offset for doors with handles



Basic Set			
9206500	Front door set for 19mm thick	1	2/92
9206500	Front door set for 19mm thick	1	2/92
9206505	Left Rear door set for offset opening	1	2/92
9206506	Right Rear door set for offset opening	1	2/92
9206309	Accessory set for offset opening	1	2/93
9185714	3000mm synchronised profile set *	1	2/95
71117	3000mm lower guide profile	1	2/95
Optional upgrades			
9169651	Soft close set	1	2/94
9169637	Soft opening set	1	2/94
9199769	Soft guiding lower set for heavy doors	1	2/94

* Synchronised profile set is order in - please allow 4 to 5 weeks for delivery

Adjustment fitting (Door Straightener)

- For straightening distorted furniture doors
- Can also be used as a precautionary measure to prevent doors from warping
- For door / front panel thicknesses from 16 mm
- Maximum door / front panel height 2600 mm
- Installing the fitting is simple and straightforward: a pair of threaded rods, one with a right-hand thread and one with a left-hand thread, are fed into a clamping sleeve
- The threaded rods are each additionally supported in a housing that slots into a 35 mm drilling where it is screwed into place
- Turning the clamping sleeve produces tensile or compressive force that corrects warping or bowing
- The housing, clamping sleeve and threaded rods are covered to prevent damage to wardrobe and laundry
- The adjustment fitting can also be used horizontally
- It is recommended that 2 vertical adjustment fittings are installed near the outer edge. On large, wide doors, 2 horizontal fittings can be used instead or in addition

Set comprises:

- 1 housing with right-hand threaded rod
- 1 housing with left-hand threaded rod
- 1 clamping sleeve
- 1 plastic cover plate
- 2 plastic cover strips
- 2 retainers for cover strips



Item code	Description	PU	Vol/Page
45198	Adjustment fitting	2	2/408

Sliding System up to 80kgs

Topline XL

Sliding door system / top running

▷ **TopLine XL**/ overlay door position




Technical details in brief


- 2-track, top running sliding door system
- Overlay door position
- For wooden doors or wood / aluminium framed doors
- Door weight up to 80 kg
- Door height up to 2600 mm
- Door width 700 - 2000 mm
- Door thicknesses 16, 18, 19, 22, 25, 28, 40, 50 mm
- Height adjustment ± 2 mm
- Door height, door offset and door reveal adjustable
- Easy to open with minimal opening resistance
- Silent System in closing, opening and colliding direction
- Fast installation of runner systems and Silent System
- Tested to DIN EN 15706, Level 3

Operating principle / installation dimensions

W	EB	X	Y	Z
16 / 18 / 19	30	14 / 12 / 11	9 / 7 / 6	14
22	33	11	6	14
28	39	11	6	14
30 / 32 / 33	44	14 / 12 / 11	9 / 7 / 6	14
40	51	11	5	15
50	61	11	5	15

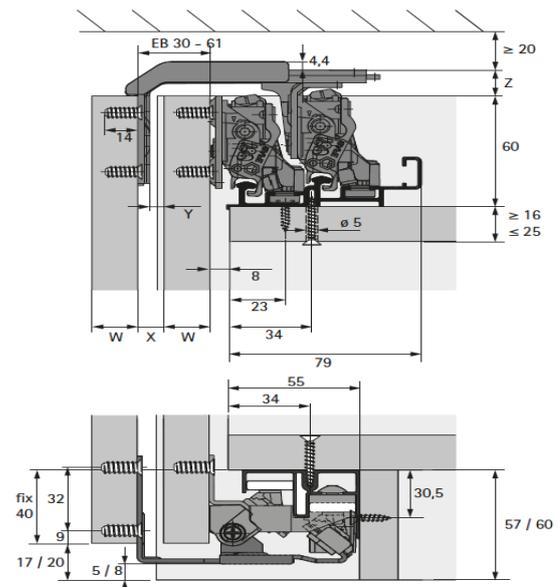

Operating principle / viewed from above

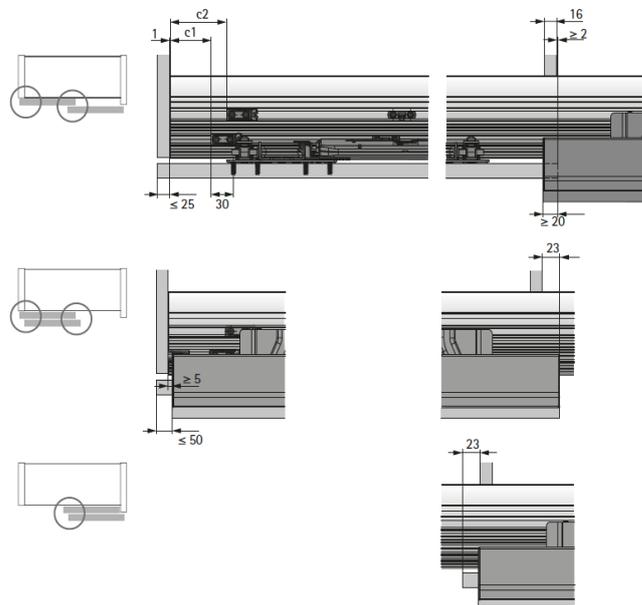

Sliding System up to 80kgs

Topline XL 2 Door sets

2 Door: front door left. Overlay position



2 Door: Front door right



Topline XL 3 Door sets

3 Door: Overlay position



Topline XL 4 Door sets*

4 Door: Overlay position, synchronised



Item code	Description	PU	Vol/ Page
9181742	Front door set for 19mm thick	1	2/28
9183533	Right rear door set	1	2/28
9135004	4000mm Profile set (top and lower)	1	2/36
Optional upgrades			
9169548	Soft close & opening set	1	2/29
Basic Set			
9181742	Front door set for 19mm thick	1	2/30
9181744	Left Rear door set	1	2/30
9135004	4000mm Profile set (top and lower)	1	2/36
Optional upgrades			
9169548	Soft close & opening set	1	2/31
Basic Set			
9181742	Front door set for 19mm thick	1	2/32
9181744	Left Rear door set	1	2/32
9183533	Right rear door set	1	2/32
9135004	4000mm Profile set (top and lower)	1	2/36
Optional upgrades			
9154933	Soft close & opening set	1	2/33
Basic Set			
9196841	Front door set for 19mm thick	1	2/34
9196841	Front door set for 19mm thick	1	2/34
9181744	Left Rear door set	1	2/35
9183533	Right rear door set	1	2/35
9191157	4000mm Profile set Reinforced	1	2/38
9185664	Soft close & opening set/ synchronised	1	2/35

***4 Door set are order in only. Please allow 4 to 5 weeks for delivery Accessories for Folding and Sliding doors**

Bottom Running up to 40kgs


SlideLine 56

Sliding door system / bottom running

▷ SlideLine 56 / inset door position




Door size and door weight

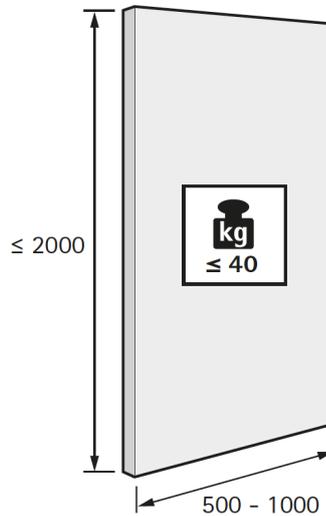


Technical details in brief

- Bottom running sliding door system
- Inset door position
- For wooden doors
- Door weight up to 40 kg
- Door height up to 2000 mm
- Door width 500 - 1000 mm
- For optional use with Silent System
- Runner and guide profile in aluminium
- Tested to EN 15706, Level 3

Operating principle

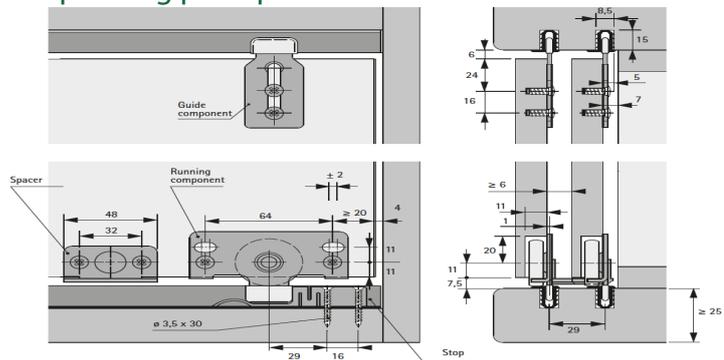

Number of door wings and door position

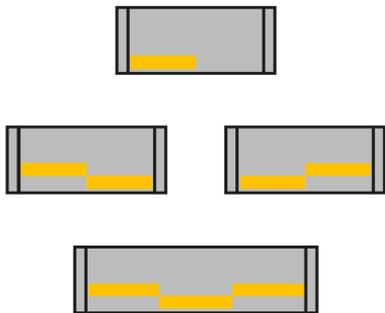

Item code	Description	PU	Vol/Page
45234	For 1 cabinet with 2 sliding doors	1	2/272
45235	For 1 cabinet with 3 sliding doors	1	2/272
9079731	Soft close set for 2 door cabinet	1	2/272
71110	3000mm silver anodized profile	1	2/272

Bottom Running 15kgs / 30kgs

SlideLine 55

Sliding door system / bottom running

▷ SlideLine 55 Plus / overlay and inset door position



Attraction for the office. SlideLine 55 Plus combines superb convenience and design with unbeatable value for money. SlideLine 55 Plus brings smooth and quiet running action to sliding doors - if preferred with

integrated Silent System. The fitting permits tool-less precision adjustment. Particularly in conjunction with overlay doors, this creates furniture with a high quality aura all of its own.


Technical details in brief

- 2-track, bottom running sliding door system
- Inset, overlay door position
- For wooden doors
- Door weight up to 15 kg with plastic profiles
- Door weight up to 30 kg with aluminium profiles
- Door height up to 1500 mm
- Door width 400 - 2000 mm
- Door thicknesses 16 - 19 mm
- Height adjustment +/- 1.5 mm, tool-less
- Tested to EN 15706, Level 3


Silent System	1-door	2-door
Soft closing		
Soft opening		

Slideline 55 Plus

Operating principle / SlideLine 55 Plus with Silent System / inset door position

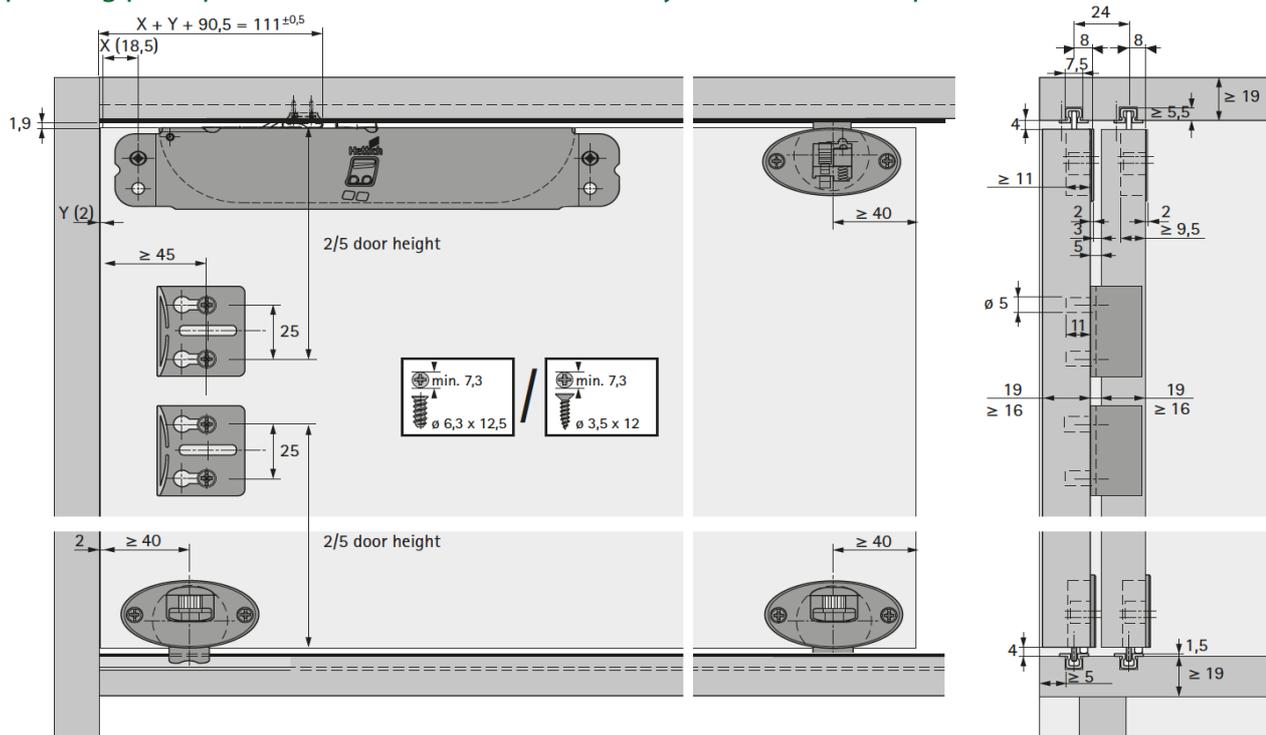

Operating principle / SlideLine 55 Plus with Silent System / overlay door position

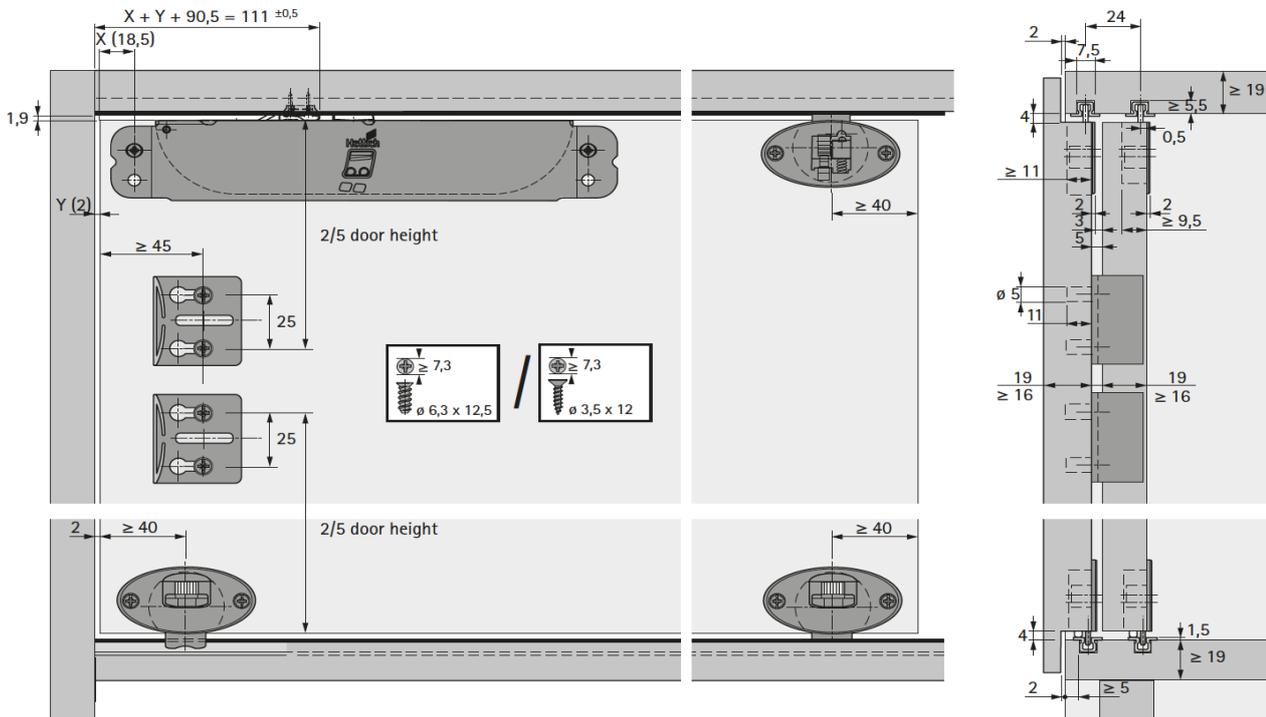

Slideline 55 Plus

System components



Item code	Description	PU	Vol/Page
9115219	Runner component for 2 inset doors	100	2/248
2 required per door			



9115217	Guide component for 2 inset doors	100	2/248
2 required per door			



9115216	Door stop/spacer		
1 stop required for a 2 door cabinet door height < 1000mm		100	2/250
2 stops required for a 2 door cabinet door height > 1000mm		100	2/250



9115218	Stay closed function, for left or right doors	100	2/250
2 stays required per door			



25121	4000mm Brown plastic track 15Kg	30	2/251
1079090	4000mm Aluminium track 30Kg	4	2/251
(Alternative colours available Ex Germany)			2/251

Retractable Door System

- KA 5740



Stroke of genius. Mounted on the KA 5740 retractable door fitting, the doors can slide back into the sides of the carcass when they are opened. Perfect, for example, for TV and multimedia furniture or for a cocktail cabinet that appears in a jiffy and disappears again just as quickly. The fitting's mechanism also vanishes from view: simply by using face frame hinges. The Hettich KA 5740 retractable door fitting is suitable for door widths of 300 to 700 mm. All options with roll-out locating catch.

- Pair of KA 5740 fittings for retractable doors
Page reference:
- Concealed hinges must be ordered separately, see Furniture Fittings and Applications catalogue 2016, volume 1, chapter Concealed hinges
- Face frame hinge must be ordered separately, see Furniture Fittings and Applications catalogue 2016, volume 1, chapter Special hinges

Item code	Description	PU	Vol/Page
41371	KA5740 for 300mm door width max	Pair	2/390
41372	KA5740 for 350mm door width max	Pair	2/390
41373	KA5740 for 400mm door width max	Pair	2/390
41374	KA5740 for 450mm door width max	Pair	2/390
41375	KA5740 for 500mm door width max	Pair	2/390
41376	KA5740 for 550mm door width max	Pair	2/390
41377	KA5740 for 600mm door width max	Pair	2/390
41378	KA5740 for 650mm door width max	Pair	2/390
41379	KA5740 for 700mm door width max	Pair	2/390



- The KA 5740 accessory set also allows you to park flaps inside the top part of the cabinet carcass upon opening them
- The set of accessories assists the slide in and, when used on flaps, keeps them in the horizontal position


Set comprises:

- 8 door stops / spacers for pressing in, \varnothing 10 mm drilling
- 4 support rollers for flaps \varnothing 20 mm
- 4 rivets \varnothing 6 x 10 mm
- 4 panhead screws \varnothing 4 x 25 mm


9079526	KA5750 Accessory set	1	2/390
---------	----------------------	---	-------



Door height = inside carcass height - 6 mm
 Door width = inside carcass width - 6 mm
 X = door height - 2 x E

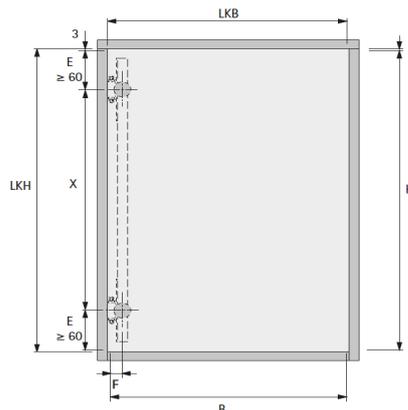


Recommended quantity of KA 5740 retractable door fittings depends on door height.

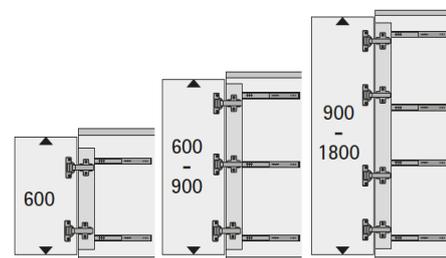


Retractable Door System KA 5740

Use with Sensys and 12 mm connecting strip

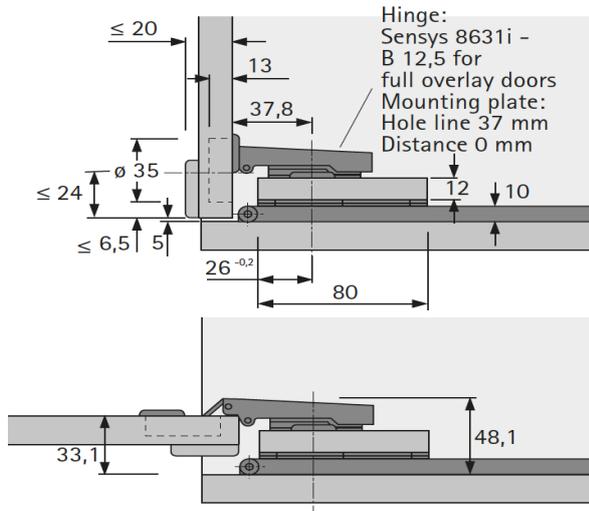


- For Sensys 8631i fast assembly hinge, see Furniture Fittings and Applications catalogue 2016, volume 1, chapter Concealed hinges Sensys
- For profile doors up to 28 mm
- 95° opening angle
- Base 12.5 mm
- Cup diameter 35 mm

Use with Intermat and 12 mm connecting strip

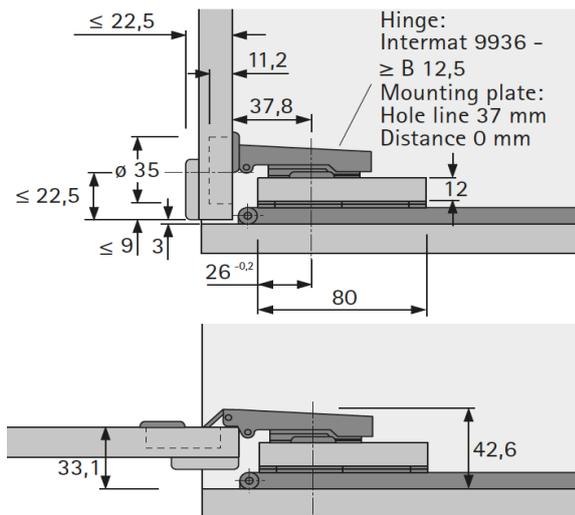

- For Intermat 9936 fast assembly hinge, see Furniture Fittings and Applications catalogue 2016, volume 1, chapter Concealed hinges Intermat
- For profile doors up to 22.5 mm
- 95° opening angle
- Base 12.5 mm
- Cup diameter 35 mm

Use with Intermat and 16 - 21 mm connecting strip

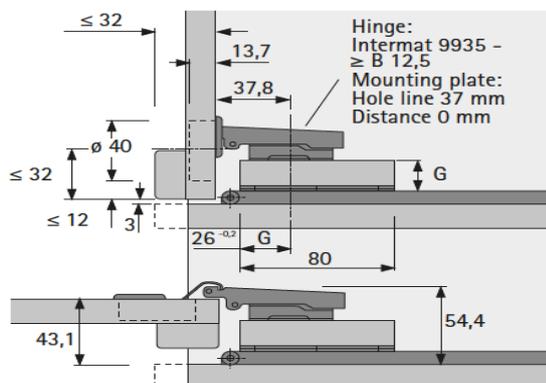


- For Intermat 9935 fast assembly hinge, see Furniture Fittings and Applications catalogue 2016, volume 1, chapter Concealed hinges Intermat
- For profile doors up to 32 mm
- 95° opening angle
- Base 18 mm
- Cup diameter 40 mm

Distance	G mm
5	16
3	18
1,5	19,5
0	21

Fittings

Leveler with M8 thread

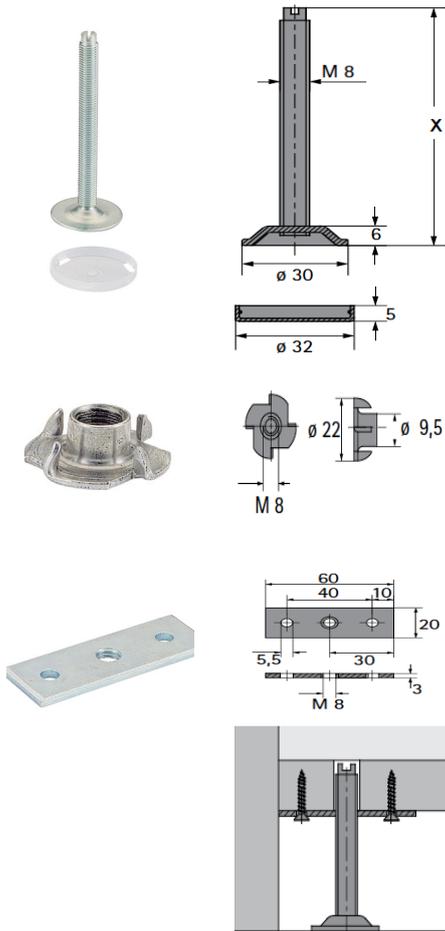

Item code	Description	PU	Vol/ Page
47637	Height x 50mm	50	2/850
47640	Height x 80mm	50	2/850

47643	Captive nut with M8 thread	50	2/850
-------	----------------------------	----	-------

47645	Supporting plate with M8 thread	50	2/850
-------	---------------------------------	----	-------

Beech Dowels



Item code	Description	PU	Vol/ Page
IDA630	6mm X 30mm	10 kg	N/A
IDA830	8mm X 30mm	10 kg	N/A
IDA835	8mm X 35mm	10 kg	N/A
IDA840	8mm X 40mm	10 kg	N/A
IDA850	8mm X 50mm	10 kg	N/A
IDA1040	10mm X 40mm	10 kg	N/A
IDA1050	10mm X 50mm	10 kg	N/A


Adjustable Plint legs



20-900-114	Pack of 4 legs, 2 plinth clips (knock in)	50	N/A
20-900-114-KI	Pack of 4 legs, 2 plinth clips	50	N/A

Vari Shelf Support


Vari shelf support rail, steel, 10 x 5 mm

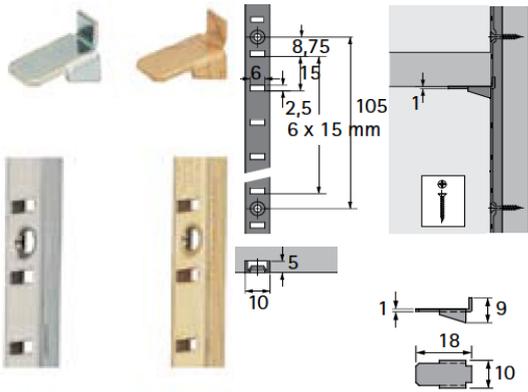

- Standard length: 3500 mm
- Steel
- Load group L 50 (50 kg / m²)


Item code	Description	PU	Vol/Page
47612	3500mm rail nickel	50	2/859
13127	Shelf support galvanised	250	2/859

Sekura 2.1

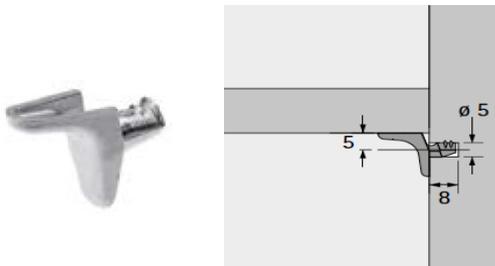

9134679	Sekura 2.1 Shelf support	500	2/854
---------	--------------------------	-----	-------

Flattened Shelf support

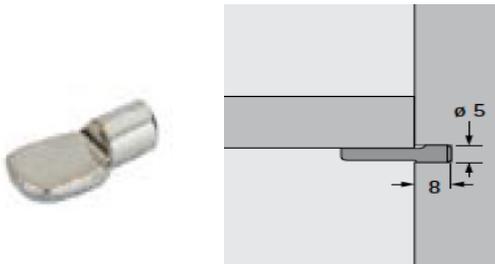


20782	Flattened shelf support	500	2/858
-------	-------------------------	-----	-------


Titan 1 with side adjustment



- Concealed installation behind the shelf
 - Bolt: 10 mm AF
 - Max. load capacity is 50 kg/m² for shelves measuring 1000 x 300 mm, 100 kg/m² for shelves measuring 1000 x 250 mm and 160 kg/m² for shelves measuring 1000 x 200 mm
 - Height adjustment: ± 4 mm
 - Side adjustment ± 4 mm
 - Minimum shelf thickness: 24 mm
 - Adjustment of shelf tilt
 - Steel, galvanised
- Page reference:
- For fixing screws (order no. 0 065 480), see page 882

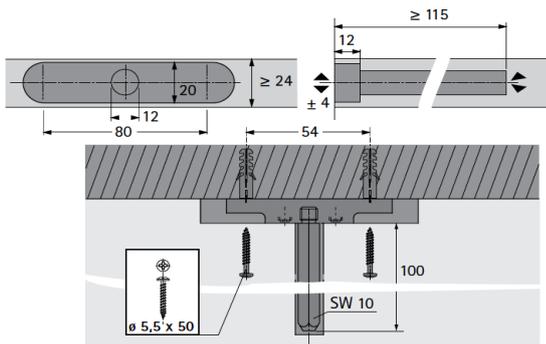

79713	Titan 1 with side adjustment	20	2/860
-------	------------------------------	----	-------





MultiClip



- MultiClip can be used in many different applications
- For wall panelling, room dividers, cladding pillars, ceiling panelling, fascias and cladding of all types
- In all applications, the fitting can be screw mounted either parallel or at right angles to the fascia or cladding component
- If it is necessary to slide the clip connectors on from the front, one of the fittings is screw mounted at an angle of 90°
- Whether for interior fittings, contract work or volume production, this fitting is a cost-saver - always and everywhere
- Only 1 fitting component for all types of application
- The clip connector components provide a secure hold with spring loaded flexible clamps and serrated surfaces
- Variable screw on positions permit to hooking in from above, from the front, from the side as well as flush fitted
- Compensation for mounting tolerances
- Clip connectors can be adjusted for perfect alignment
- Thermoplastic material, black (heat resistant)

Item code	Description	PU	Vol/Page
46080	MultiClip connector	200	2/808

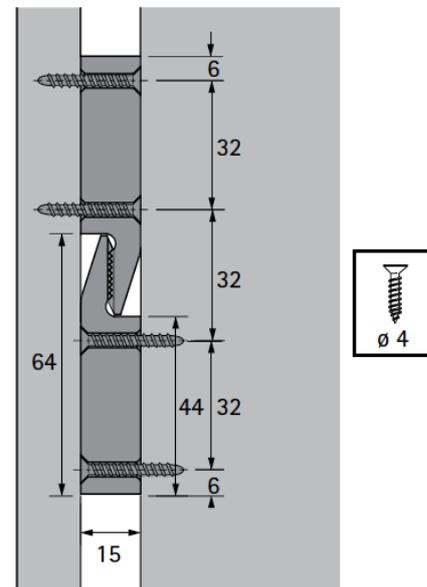
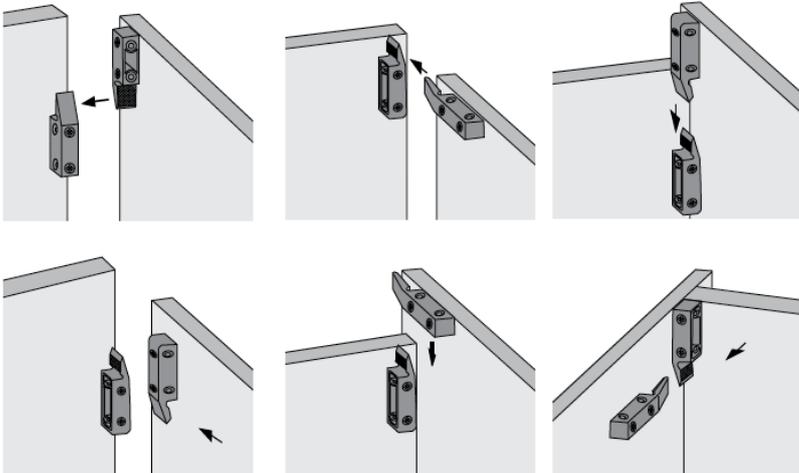


Euro angle for 32 mm hole line



- Can be used as a multi-purpose connecting fitting for carcasses, shelves, rear panels and drawer fronts
- Connecting angles: steel, galvanised
- Plastic cover cap
- Direct fixing screws, \varnothing 6.3 mm
- Can be used in System 32

Item code	Description	PU	Vol/Page
24832	Galvanised connecting angle	200	2/815
50314	Plastic cover cap White	200	2/815

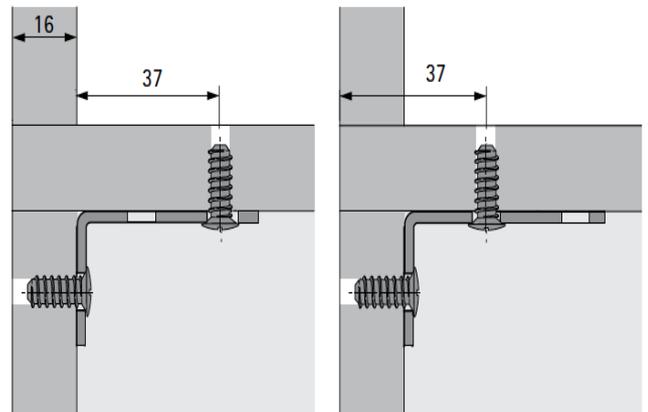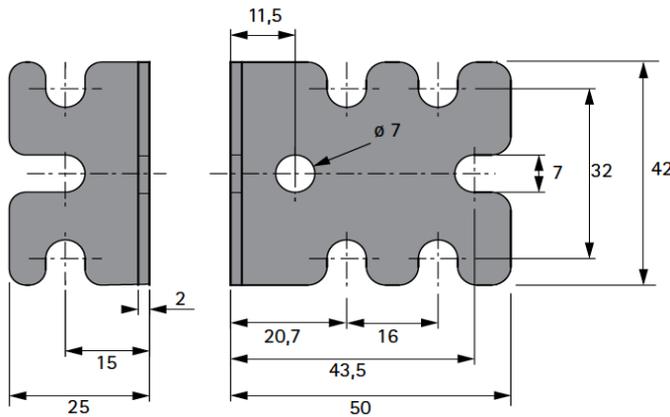


Universal corner connector




- Universal corner connector for small carcasses and for supporting low loads
- For attachment with 3.5 mm \varnothing countersunk head screw
- The cover cap simply clips on to conceal the screws
- Plastic

Item code	Description	PU	Vol/Page
44742	White universal connector	100	2/816

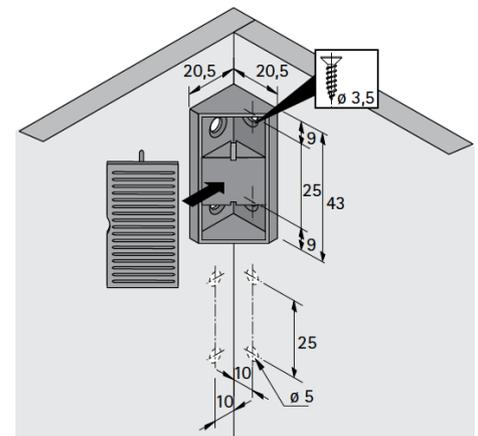

Universal suspension rail, type B

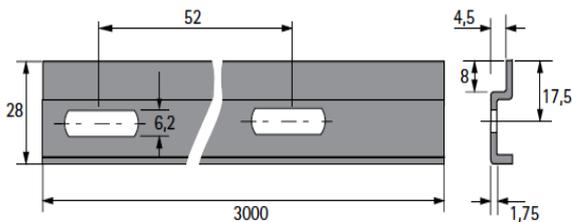

- For SAH 15, SAH 116, SAH 130, SAH 215 / 216 cabinet suspension brackets
- Load capacity 150 kg / cabinet
- Attachment:
 - with 2 special screws $\varnothing 5.5 \times 50$ mm near each cabinet suspension bracket
 - an additional special screw $\varnothing 5.5 \times 50$ must be fitted in the centre behind each carcass over 900 mm wide
 - use special fixing screws, see page 882
- With oblong holes
- Steel, galvanised

Advice:

- Suspension rail without slip off protection; on adjusting the position of the wall unit it may slip off the suspension rail and fall!
- Custom lengths on request

Item code	Description	PU	Vol/Page
9007651	Suspension rail 3000mm	50	2/881


Cabinet suspension bracket SAH 15




- For screwing on
- For rail and hook suspension
- Guard to prevent slipping off sideways when suspended from a hook
- Load capacity 30 kg / each in accordance with EN 15939 in test rack
- A (one pair of SAH per carcass; elements without own suspension, such as end shelves, are not permitted)
- 3-dimensional alignment: height $-2/+9$ mm , depth $-2/+18$ mm , laterally (for hook suspension) ± 6 mm / laterally (for rail suspension) ± 7 mm
- Rear panel recess (to front edge of rear panel) at least 15 mm
- Lift off height 6 mm
- Suitable for use with B type and L type suspension rails
- Steel, galvanised / white plastic

Item code	Description	PU	Vol/Page
9208645	SAH 15 bracket (pair)	25	2/874
9208646	White cover for SAH 15 bracket (set)	25	2/874


Rastax 15 Eccentric cam connection fitting

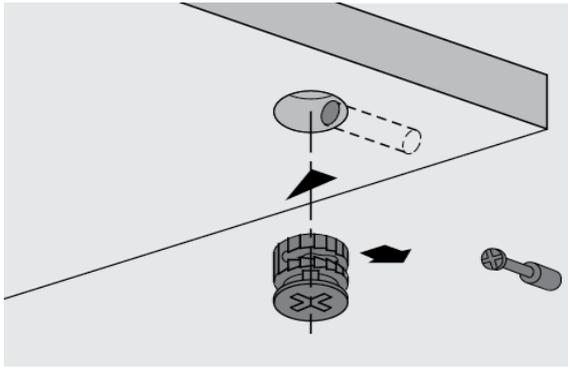


- With torque support – allows furniture side panels to be pulled into place from space up to 4 mm from the panel end
 - Twice as secure thanks to interior and exterior indentations – the dowel is always pulled in to the centred position, ruling out any displacement of furniture components!
 - Eccentric cam can be tightened with flat-blade screwdriver, Pozidriv screwdriver PZ 3 or Allen key AF 4
 - With or without rim, the rim covers any jagged drillings, making an additional cover cap unnecessary
 - zinc die-cast
- Page reference:
- For drill bits for hand and pillar drills, see page 1219

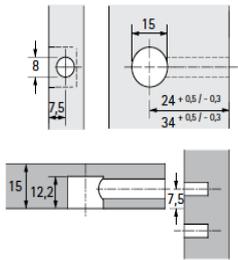


Item code	Description	PU	Vol/ Page
9059487	Rastex 15 for 15mm bottom panel (Nickel)	2000	2/772
79461	Rastex 15 for 15mm bottom panel (Bright)	200	2/772





9053206	Rastex 15 for 18mm bottom panel (Nickel)	2000	2/772
9056604	Rastex 15 for 18mm bottom panel (Black)	2000	2/772

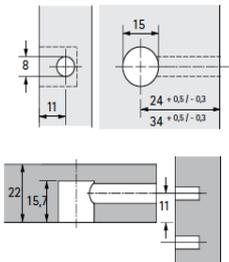


79476	Rastex 15 for 22mm bottom panel (Bright)	200	2/772
-------	--	-----	-------



9046180	Rapid S fast installation dowel 20mm (44750)	2000	2/775
9046182	Rapid S fast installation dowel 30mm (47458)	2000	2/775




9047644	Twister dowel 30mm screw in (48038)	2000	2/775
---------	-------------------------------------	------	-------



Eccentric connecting fitting

• VB 35M / With rib

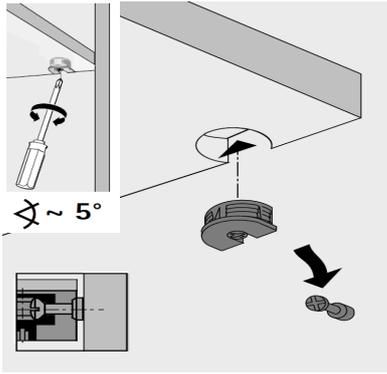

- Small connecting fittings for sturdy, positive fitting and friction locked connections between shelves and side panels using the tried and proven eccentric cam latching principle
- The fitting is pressed into the cropped 20 mm diameter drilling
- The fitting has a spherical eccentric cam
- Zinc die-cast / plastic
- Can be used in System 32



Page reference:

- For drill bits for hand and pillar drills, see page 1219


Item code	Description	PU	Vol/Page
9066718	VB 35 for 16mm Brown (65504)	1000	2/786



9064890	VB 35 M for 16mm White	2000	2/786
1019493	VB 35 M for 19mm Nickel (65505)	2000	2/786



VB 35 without rib

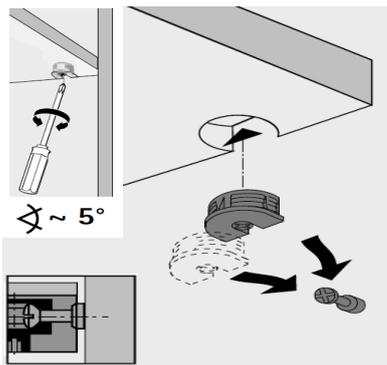


- Small connecting fittings for sturdy, positive fitting and friction locked connections between shelves and side panels using the tried and proven eccentric cam latching principle
- The fitting is pressed into the cropped 20 mm diameter drilling
- The fitting has a spherical eccentric cam
- Zinc die-cast / plastic
- Can be used in System 32


Page reference:

- For drill bits for hand and pillar drills, see page 1219

Item code	Description	PU	Vol/Page
9143776	VB 35D for 19mm Nickel (65513)	200	2/786



VB 36 with rib

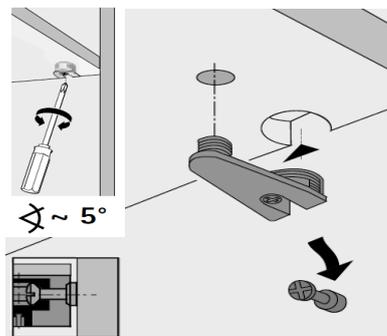


- Small connecting fittings for sturdy, positive fitting and friction locked connections between shelves and side panels using the tried and proven eccentric cam latching principle
- The fitting is pressed into a double hole drilled 32 mm apart.
- Insertion holes in a diameter of 20 and 10 mm
- The fitting has a spherical eccentric cam
- Zinc die-cast / plastic
- Can be used in System 32


Page reference:

- For drill bits for hand and pillar drills, see page 1219

Item code	Description	PU	Vol/Page
1019483	VB 36 M Brown (65520)	500	2/788
1019492	VB 36 MD Nickel	250	2/788




Double dowel DU 712 / DU 867



- For 16 mm and 19 mm centre panel
- Drilling diameter 5 mm
- Dowel length 6.7 mm
- Can be used for lightweight panels
- Steel, bright
- Can be used in System 32

Item code	Description	PU	Vol/Page
1019463	DU 867 for 19mm (65536)	2000	2/791


Screw in dowel DU 321



- With direct fixing thread for drilling diameter of 5 mm
- Dowel length 6.7 mm
- Can also be used for lightweight panels with 8 mm face layers
- For lightweight panels with 4 mm face layers installation only with
- Hettinject bonding dowels
- Steel, galvanised
- Can be used in System 32

Item code	Description	PU	Vol/Page
9021847	DU 321 (74688)	2000	2/790

Block connecting fitting - TZ 28

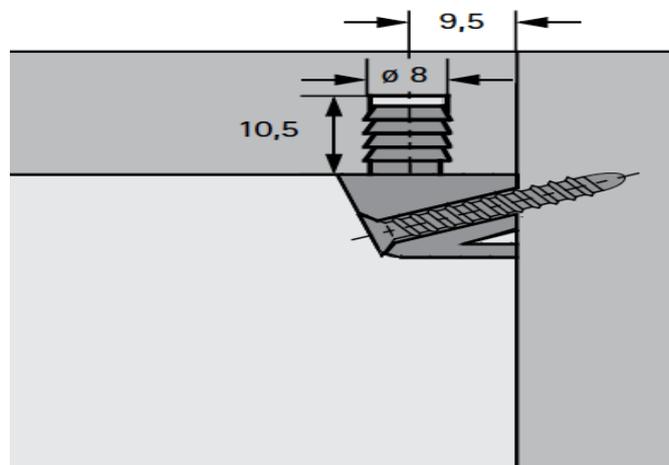

Item code	Description	PU	Vol/Page
1005078	TZ 28 (72053)	2000	2/795

Handles


Item code	Name/ Finish	Page ref	Image	Dimensions
9207507	Tornea Bright Copper 128mm	25		
9112940	Tornea Stainless 128mm	25		
9204020	Magina Bright copper 192mm	123		
9208069	Urmia/ Antique pewter	188		
9113225	Haida/ Stainless-steel	160		
9113292	Terrando/ Stainless (128mm)	160		
9070681	Dinia/ Strainless (128mm)	117		
9113228	Matane/ Stainless-steel	178		
9070520	Bona/ Chrome	98		
9070523	Bona/ Stainless-steel	98		
9113659	Sines/ Matt Nickel	187		

Handles

Item code	Name/ Finish	Page ref	Image	Dimensions
9207444	Buena/ Bright Copper	76		
9207447	Buena/ Bright Copper	77		
9071927	Torino/Bright Chrome 232mm	15		

Lamezia Chrome

Item code	Size	Vol/Page
9105801	295	51
9105802	345	51
9105803	395	51
9105805	445	51
9105806	495	51
9105807	595	51
9105809	795	51
9105810	895	51
9105811	995	51
9105813	1195	51

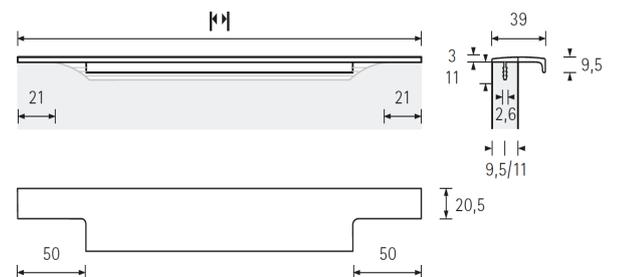

All of the handles above are stocked in Dublin - we have access to over 300 different designs, all of a very high quality available ex Germany normally within 7 working days. Next day delivery is possible, €30 surcharge applies. Please consult our handle catalogue and call for prices.
(All quoted prices are Excluding VAT)

Office



Systema Top 2000 Work Station Pedestal
Installed width 380mm/ hole line 32mm.
Suggested option, 3 drawers with pencil tray



Item code	Description	Vol/Page
1083843	Pencil Tray Black	3 / 32

1084033	Quadro 12 runners for Pencil tray	3/34
---------	-----------------------------------	------

1077386	Drawer with 730mm installed depth. Black	3 / 40
1077387	Drawer with 530mm installed depth. Black	3 / 40

1056356	KA Runner for Drawers	3 / 43
---------	-----------------------	--------

1056341	Stop control housing	3 / 46
---------	----------------------	--------

1040173	Front stay Left black*	3 / 51
1040174	Front stay Left black*	3 / 51
* Required for front panels of 192mm and over		

1060965	Lock connector	3 / 145
---------	----------------	---------

1053484	Locking bar 500mm	3 / 145
1056663	Locking bar 375mm	3 / 145

For locking options please refer to Locks section page 95 of this catalogue

Office



Systema Top 2000 Work Station Pedestal
 Installed width 380mm/ hole line 32mm -
 Suggested option 1 drawer with cradle,
 1 standard drawer and 1 pencil tray



Item code	Description	Vol/Page
1083843	Pencil Tray Black	3/32
1084033	Quadro 12 runners for Pencil tray	3/34
1077386	Drawer with 730mm installed depth. Black	3/40
1077387	Drawer with 530mm installed depth. Black	3 40
1056356	KA Runner for Drawers	3/43
1056341	Stop control housing	3/46
1040173	Front stay Left black*	3/51
1040174	Front stay Left black*	3/51
* Required for front panels of 192mm and over		
1060965	Lock connector	3 /145
1053484	Locking bar 500mm	3 /145
1056663	Locking bar 375mm	3 /145
For locking options please refer to Locks section page 95 of this catalogue		
9087694	Duplex 60 X 22 runners	3/237
9039924	Cradle	3/124
9039362	Divider	3/125

Hanging File Frame. Cabinet depth 430mm

Hanging File Frames for use in 1000 mm carcasses if using 22 mm gables
If using 18 mm gables overall cabinet width is 992 mm

- For wall-to-wall and carcass construction
- For installation in cabinets with front panels or hinged doors
- For use with Quadro Duplex 60 drawer runner
- Lock activators are premounted on the hanging file frame
- Tool-less slide on installation
- Power coated steel



Minimum front height for 32 mm hole line:

- 2 height units HE (128 mm) for the hanging file frame and wide drawer
- 2.5 height units HE (160 mm) for SysTech drawer side profile

Advice:

- The required front height depends on the organiser accessories concerned
- A Cover profile is recommended for use behind hinged doors

Technical note for Quadro Duplex:

- Dimension X = 13 mm for standard cabinets
- Dimension X = 22 mm for cabinets with large door protrusion

Page Reference:

- For accessories, see page 306 - 307
- For front panel connector, see page 239
- For front stays, see page 239 - 240
- For installing hanging file frame, see page 360 - 361, 367 - 368



Item code	Description	Vol/Page
1054310	Fixed width frame, 950mm X 430mm	3/236
9087694	Duplex 60 X 22 runners	3/237
1049228	Self close housing Left	3/238
1049229	Self close housing Right	3/238
1053484	Locking bar 500mm	3/145
1056663	Locking bar 375mm	3/145
9039876	Divider bar 383mm	

Hanging File Frame, Cabinet depth 430mm

Hanging File Frame with infinitely adjustable width



- Makes it possible to produce filing cabinets of any width
- Simple planning of wall - to - wall cabinets
- Also for retrofitting without difficulty in existing cabinets
- For installation in cabinets with front panels or hinged doors
- For use with Quadro Duplex 60 drawer runner
- Lock activators are premount on the hanging file frame
- Tool-less slide on installation
- Powder coated steel

Set comprises:

- 1 side panel, right
- 1 side panel, left
- 2 centre profiles
- 4 connecting brackets
- Edge protection

Advice:

- The required front height depends on the organiser accessories concerned
- A Cover profile is recommended for use behind hinged doors

Technical note for Quadro Duplex:

- Dimension X = 13 mm for standard cabinets
- Dimension X = 22 mm for cabinets with large door protrusion

Page Reference:


- For accessories, see page 306 - 307
- For front panel fixing screws and front stays, see page 290-291
- For installation, see page 360 - 361



Item code	Description	Width	Vol/Page
1084131	Black adjustable width frame	368-540	3/288
1084132	Black adjustable width frame	534-706	3/288
1084133	Black adjustable width frame	700-872	3/288
1084134	Black adjustable width frame	866-1038	3/288
1084135	Black adjustable width frame	1032-1204	3/288


Minimum carcass depth for infinitely adjustable hanging file frame

- Cabinet with front panels = 412 mm (430 mm when using Parallel system)
- Cabinet with hinged doors = 432 mm (450 mm when using Parallel system)

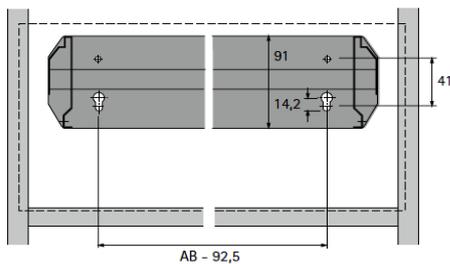

Minimum carcass depth for SysTech drawer side profile

- Cabinet with front panels = 416 mm
- Cabinet with front panels = 438 mm when using Parallel system

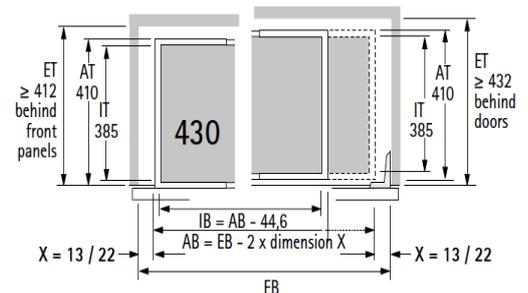

AB = Outside width	EB = Installed width	IB = Inside width
AT = Outside depth	ET = Installed depth	IT = Inside depth

Hanging File Frame, Cabinet depth 430mm


Hanging File Frame with infinitely adjustable width

Item code	Description	Vol/Page
9087694	Duplex 60 X 22 runners	3/237
1049228	Self close housing Left	3/238
1049229	Self close housing Right	3/238
1053484	Locking bar 500mm	3/145
1056663	Locking bar 375mm	3/145
9039876	Divider bar 383mm	





Hettich

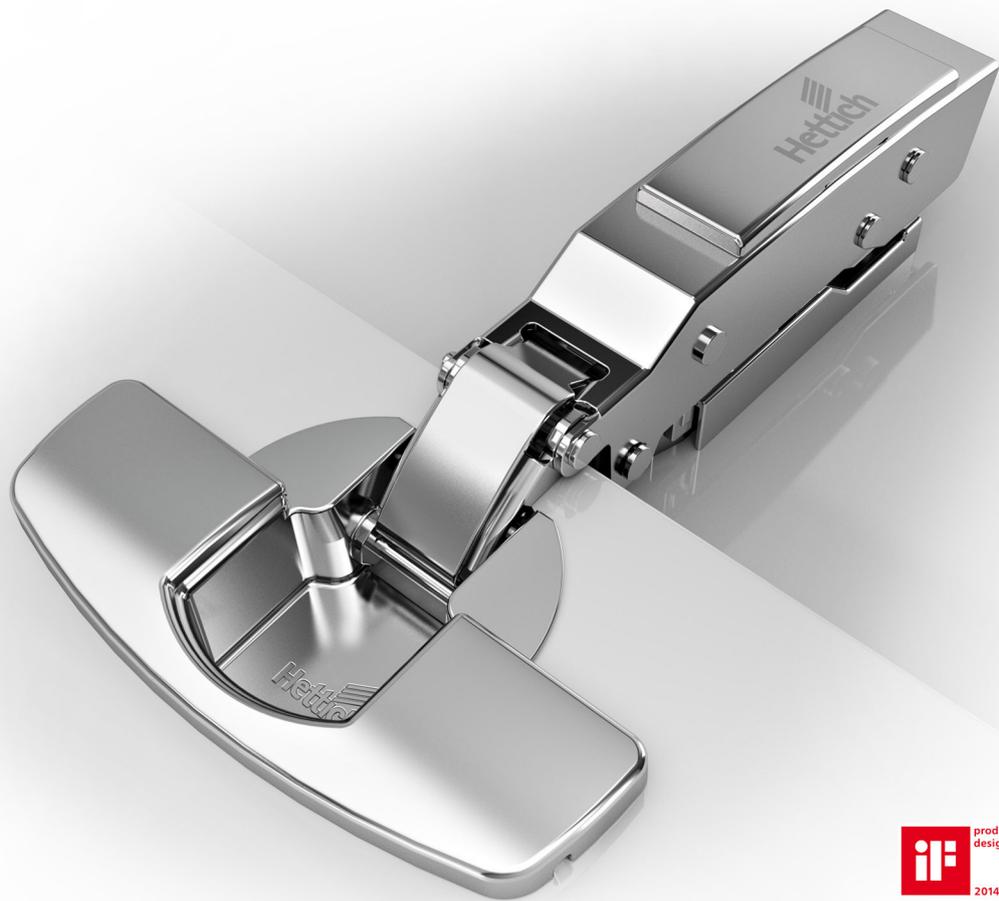

For further inquires please contact our head of furniture fittings
Mr. Allen Paul **087 144 9363** or email: allen@naa.ie



Hettich eService

- On-line catalogue: This provides all information on products and applications, dimensions, details, prices and installation.
- Configurators: For putting different products together the easy and convenient way.
- Hettich App: Whether it's the latest catalogues, magazines, instructions or videos you want - you can now get them even easier and faster.
- **www.hettich.com**