


## Sliding and Folding

### Wingline 770 Bi fold system



- For 1 folding door with 2 wings
- Overlay door position
- For wooden doors
- Suitable for use with Sensys hinge with Silent System
- Door wing weight up to 20 kg
- Door height up to 2200 mm
- Door wing width up to 500 mm
- With WingLine 26 as bottom guide
- Tested with 40000 cycles



Item code	Description	PU	Vol/Page
070968	Left door kit	1	2/342
070969	Right door kit	1	2/342
Order Tracks separately as below			



1079089	2000mm Top profile	1	2/342
---------	--------------------	---	-------

72919	2000mm Lower guide profile	1	2/342
-------	----------------------------	---	-------

# Sliding and Folding

## Wingline 780 Bi fold system



- For 1 folding door with 2 wings
- Overlay door position
- For wooden doors
- Suitable for use with Sensys hinge with Silent System
- Door wing weight up to 10 kg
- Door height up to 900 mm
- Door wing width up to 500 mm
- Tested with 40000 cycles



Item code	Description	PU	Vol/Page
9080212	Left door kit	1	2/350
9080213	Right door kit	1	2/350
Order Track separately as below			



1079089	2000mm Top profile	1	2/342
---------	--------------------	---	-------

## Sliding and Folding

### Bi fold 77 system

**Fantastic flexibility.** With Wing 77, you can produce cabinet front panels with two door wings (no more than 25 kg each) or four door wings (no more than 20 kg each).


The clever part: the entire door set is free moving! Door sets can also be interlinked. Surprise your customers with individually tailored folding door solutions for the bedroom or office. Wing 77 gives you the design flexibility to do so.




### Performance Summary

- Folding door system with 2 or 4 door wings
- Overlay door position
- For wooden doors
- Door wing weight up to 20 kg (25 kg) with 4 (2) door wings
- Door height up to 2400 mm
- Door wing width up to 400 mm (500 mm) with 4 (2) door wings
- Height adjustment +/- 3 mm
- Centre panels recessed 40 mm
- Tested with 40000 cycles


### Door material

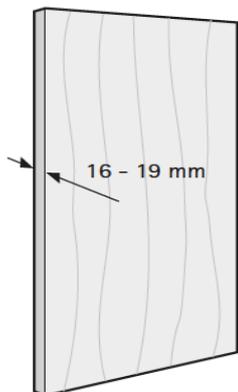

### Door size and door weight

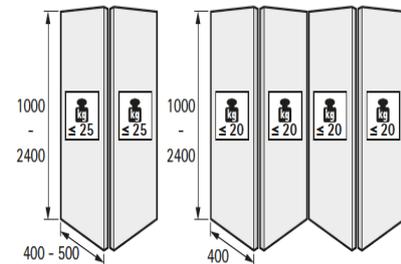

### Number of door wings and door position

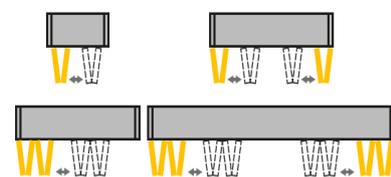

## Sliding and Folding

### Bi fold 77 system

- Set contains all the parts required for 1 folding sliding door with 4 wings
- The inside carcass width of 800 mm should not be exceeded. The top panel must be designed so that it cannot sag by more than 1.5 mm under the weight of the folded doors.

Set comprises:

- 4 tandem running components for fast installation
- 4 supports for running component with + / - 5 mm height adjustment
- 1 spacer spindle for tandem running component
- 3 guide components and centre guide component
- 2 latch plates
- 8 clip on centre hinges
- 4 spacers
- 4 end stops
- 8 noise absorbing felts (to buffer doors against the carcass) for positioning at the top and bottom on each door wing
- Fixing material

Advice:

- Please order profiles separately (see page 377)



Item code	Description	PU	Vol/Page
70987	4 panel set	1	2/376
70985	Wing 77 guide profile 3200mm	4	2/377
9193574	Wing 77 runner profile 3200mm	4	2/377

## Sliding System up to 35kgs

### Topline M with or without Soft Close

#### Sliding door system / top running

- ▷ **TopLine M** / overlay door position
- ▷ System components / 2-door


#### Technical details in brief

- 2-track, top running sliding door system
- Overlay door position
- For wooden doors
- Door weight up to 35 kg
- Door height up to 2300 mm
- Door width 500 - 1250 mm
- Door thicknesses 15, 16, 18, 19 mm
- 2 opening versions: fully flush or offset when using projecting handles
- Tested to EN 15706, Level 2



For full specifications and installation dimensions see page 132 Volume 2

#### STB 16.1 set. for guide system in front of the bottom panel

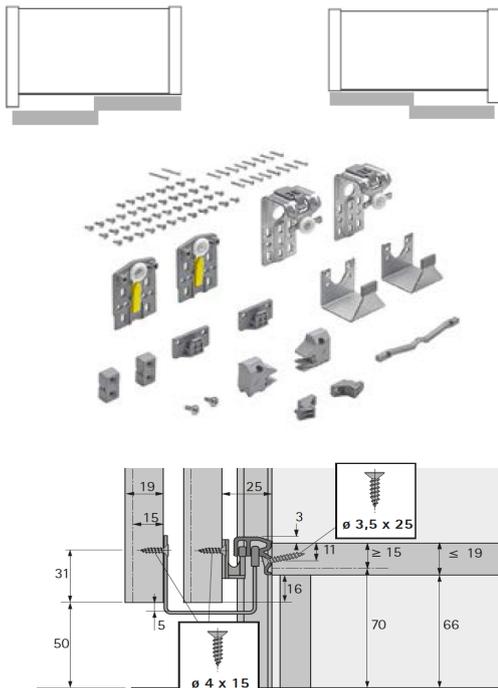

STB 16.1

- Offset opening for applications with door handles or finger pulls (door offset: 58 mm)
- Flush opening for handleless applications and when using internal drawers (door offset: 0 mm)
- Running components with integrated lift off guard
- Package contains all the fitting parts required for an entire 2-door cabinet
- For door thicknesses of maximum 19 mm (EB 29)

#### Set comprises:

- 2 running components for one front most door
- 2 running components for one rear most door
- 2 guide components for one front most door
- 2 guide components for one rear most door
- 2 support blocks for the runner profile
- 2 end stops for the runner profile
- 1 spacer for offset

Item code	Description	PU	Vol/Page
9133612	2 door standard set for STB 16.1	1	2/136
9144901	2 door soft close - offset open only * optional*	1	2/137
9117426	3000mm Runner Profile	1	2/140
9131837	3000mm STB 16.1 guide profile	1	2/141


## Sliding System up to 35kgs

### TopLine M with or without Soft Close

Sliding door system / top running


- ▷ **TopLine M** / overlay door position
- ▷ System components / 3-door

STB 16.1 set, for guide system in front of the bottom panel

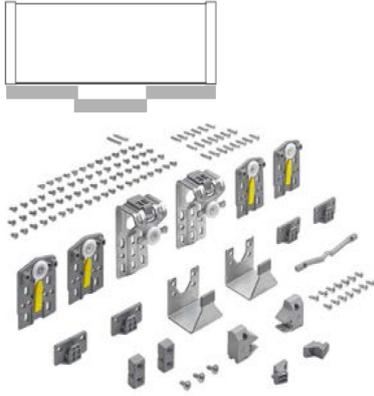

- Offset opening for applications with door handles or finger pulls (door offset: 58 mm)
- Flush opening for handleless applications and when using internal drawers (door offset: 0 mm)
- Running components with integrated lift off guard
- Package contains all the fitting components required for an entire 3-door cabinet
- For door thicknesses of maximum 19 mm (EB 29)
- Set comprises:
  - 2 running components for one front most door
  - 4 running components for two rear most doors
  - 2 guide components for one front most door
  - 4 guide components for two rear most doors
  - 2 support blocks for the runner profile
  - 2 end stops for the runner profile
  - 1 spacer for offset opening
  - Fixing material

Item code	Description	PU	Vol/Page
9129577	3 door standard set for STB 16.1	1	2/138
9144902	3 door soft close - offset open only * optional*	1	2/139
9117426	3000mm Runner Profile	1	2/140
9131837	3000mm STB 16.1 guide profile	1	2/141

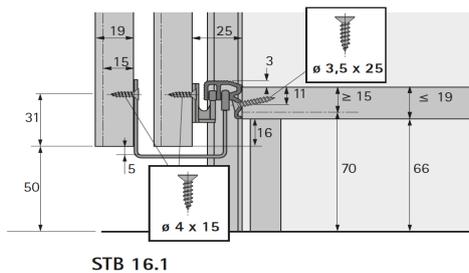

## Sliding System up to 50kgs

### Topline L

Sliding door system / top running

▷ **TopLine L** / overlay door position / door movement in front of top panel






#### Technical details in brief

- 2-track, top running sliding door system
- Overlay door position
- For wooden doors or wood / aluminium framed doors
- Door weight up to 50 kg
- Door height up to 2600 mm
- Door width 700 - 1500 mm
- Door thicknesses 16, 18, 19, 21, 22, 25, 40 mm
- Height adjustment +/- 3 mm
- Door opening options: fully overlapping or offset when using projecting handles
- Fast installation of guide components
- Silent System in opening and closing direction
- Tested to DIN EN 15706, Level 3


All stocked sets are based on 18/19mm door thicknesses. For thicker doors alternative kits are available Ex-Germany. Please see page 74 and on in Volume 2 of the Hettich Catalogue.

#### Operating principle / installation dimensions


X	Y	EB
16	12	28
18	13	31
19	12	31
21	13	34
22	12	34
25	12	37
40	12	52

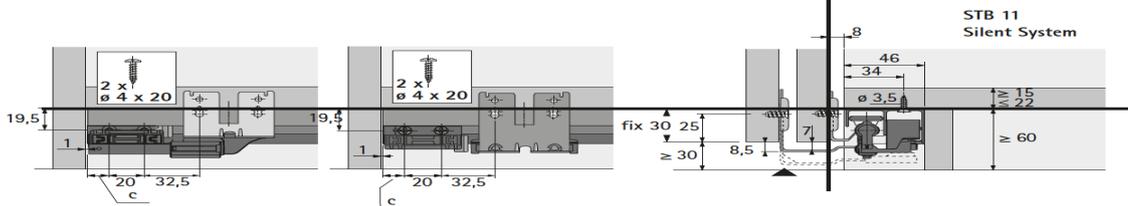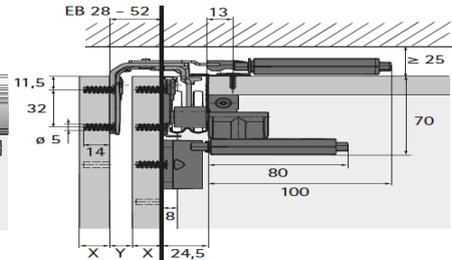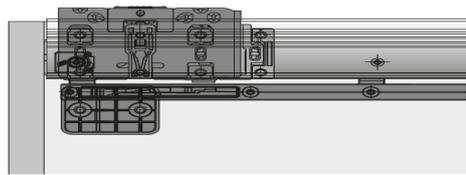

#### 1 Operating principle / flush opening

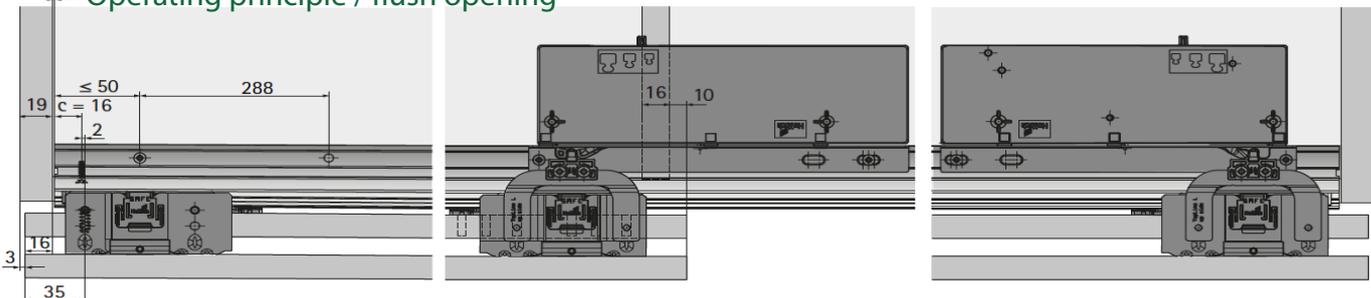

#### 1 Operating principle / offset opening

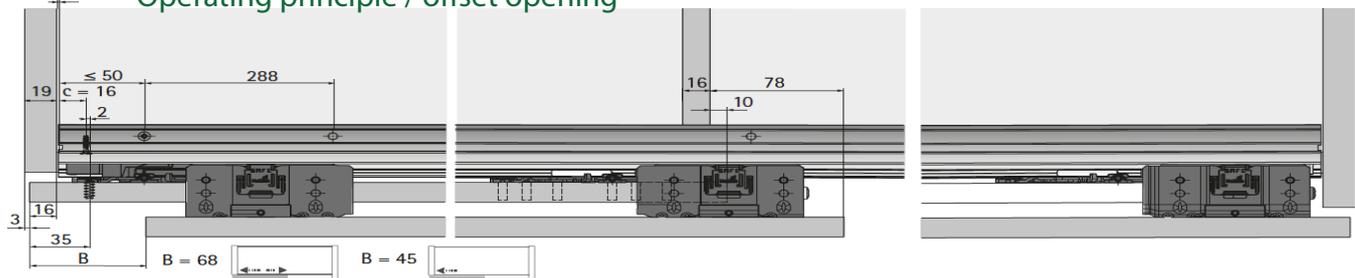

## Sliding System up to 50kgs

### Topline L 2 Door sets

2 Door: Front door left.  
45mm offset for doors with handles



2 Door: Front door left. Flush opening for handleless & Internal drawer



2 Door: Front door right.  
45mm offset for doors with handles



2 Door: Front door right. Flush opening for handleless & Internal



Item code	Description	PU	Vol/Page
9206500	Front door set for 19mm thick	1	2/78
9206506	Rear door set for offset opening	1	2/78
9206309	Accessory set for offset opening	1	2/79
71111	3000mm top runner profile	1	2/90
71117	3000mm lower guide profile	1	2/91
<b>Optional upgrades</b>			
9169651	2 door soft close set		2/80
9169367	2 door soft opening set		2/80
9199769	Soft guiding lower set for heavy doors		2/81
<b>Basic Set</b>			
9206500	Front door set for 19mm thick	1	2/78
9206508	Rear door set for flush opening	1	2/79
9206311	Accessory set for flush opening	1	2/78
71111	3000mm top runner profile	1	2/90
71117	3000mm lower guide profile	1	2/91
<b>Optional upgrades</b>			
9169654	2 door soft close set	1	2/80
9169638	2 door soft opening set	1	2/81
9199769	Soft guiding lower set for heavy doors	1	2/81
<b>Basic Set</b>			
9206500	Front door set for 19mm thick	1	2/82
9206505	Rear door set for offset opening	1	2/82
9206309	Accessory set for offset opening	1	2/83
71111	3000mm top runner profile	1	2/90
71117	3000mm lower guide profile	1	2/91
<b>Optional upgrades</b>			
9169651	2 door soft close set	1	2/84
9169367	2 door soft opening set	1	2/84
9199769	Soft guiding lower set for heavy doors	1	2/81
<b>Basic Set</b>			
9206500	Front door set for 19mm thick	1	2/82
9206508	Rear door set for Flush opening	1	2/83
9206311	Accessory set for flush opening	1	2/83
71111	3000mm top runner profile	1	2/90
71117	3000mm lower guide profile	1	2/91
<b>Optional upgrades</b>			
9169655	2 door soft close set	1	2/84
9169640	2 door soft opening set	1	2/84
9199769	Soft guiding lower set for heavy doors	1	2/81

## Sliding System up to 50kgs

### Topline L 3 Door sets

#### 3 Door: 45mm offset for doors with handles



Item code	Description	PU	Vol/Page
9206500	Front door set for 19mm thick	1	2/86
9206505	Left Rear door set for offset opening	1	2/86
9206506	Right Rear door set for offset opening	1	2/86
9206310	Accessory set for offset opening	1	2/87
71111	3000mm top runner profile	1	2/90
71117	3000mm lower guide profile	1	2/91
<b>Optional upgrades</b>			
9140438	Soft close for center door	1	2/88
9169653	Soft close set for rear doors	1	2/88
9169656	Soft opening set	1	2/88
9199769	Soft guiding lower set for heavy doors	1	2/89

#### 3 Door: Flush opening for handleless & internal drawer options



<b>Basic Set</b>			
9206500	Front door set for 19mm thick	1	2/86
9206508	Rear door set for flush opening	1	2/87
9206508	Rear door set for flush opening	1	2/87
9206313	Accessory set for flush opening	1	2/87
71111	3000mm top runner profile	1	2/90
71117	3000mm lower guide profile	1	2/91
<b>Optional upgrades</b>			
9140438	Soft close for center door	1	2/88
9169653	Soft close set for rear doors	1	2/88
9169656	Soft opening set	1	2/88
9199769	Soft guiding lower set for heavy doors	1	2/89

### Topline L 4 Door sets\*

#### 4 Door: 45mm offset for doors with handles



<b>Basic Set</b>			
9206500	Front door set for 19mm thick	1	2/92
9206500	Front door set for 19mm thick	1	2/92
9206505	Left Rear door set for offset opening	1	2/92
9206506	Right Rear door set for offset opening	1	2/92
9206309	Accessory set for offset opening	1	2/93
9185714	3000mm synchronised profile set *	1	2/95
71117	3000mm lower guide profile	1	2/95
<b>Optional upgrades</b>			
9169651	Soft close set	1	2/94
9169637	Soft opening set	1	2/94
9199769	Soft guiding lower set for heavy doors	1	2/94

\* Synchronised profile set is order in - please allow 4 to 5 weeks for delivery

## Adjustment fitting (Door Straightener)

- For straightening distorted furniture doors
- Can also be used as a precautionary measure to prevent doors from warping
- For door / front panel thicknesses from 16 mm
- Maximum door / front panel height 2600 mm
- Installing the fitting is simple and straightforward: a pair of threaded rods, one with a right-hand thread and one with a left-hand thread, are fed into a clamping sleeve
- The threaded rods are each additionally supported in a housing that slots into a 35 mm drilling where it is screwed into place
- Turning the clamping sleeve produces tensile or compressive force that corrects warping or bowing
- The housing, clamping sleeve and threaded rods are covered to prevent damage to wardrobe and laundry
- The adjustment fitting can also be used horizontally
- It is recommended that 2 vertical adjustment fittings are installed near the outer edge. On large, wide doors, 2 horizontal fittings can be used instead or in addition

Set comprises:

- 1 housing with right-hand threaded rod
- 1 housing with left-hand threaded rod
- 1 clamping sleeve
- 1 plastic cover plate
- 2 plastic cover strips
- 2 retainers for cover strips



Item code	Description	PU	Vol/Page
45198	Adjustment fitting	2	2/408

## Sliding System up to 80kgs

### Topline XL

Sliding door system / top running

▷ **TopLine XL**/ overlay door position




#### Technical details in brief


- 2-track, top running sliding door system
- Overlay door position
- For wooden doors or wood / aluminium framed doors
- Door weight up to 80 kg
- Door height up to 2600 mm
- Door width 700 - 2000 mm
- Door thicknesses 16, 18, 19, 22, 25, 28, 40, 50 mm
- Height adjustment  $\pm 2$  mm
- Door height, door offset and door reveal adjustable
- Easy to open with minimal opening resistance
- Silent System in closing, opening and colliding direction
- Fast installation of runner systems and Silent System
- Tested to DIN EN 15706, Level 3

#### Operating principle / installation dimensions

W	EB	X	Y	Z
16 / 18 / 19	30	14 / 12 / 11	9 / 7 / 6	14
22	33	11	6	14
28	39	11	6	14
30 / 32 / 33	44	14 / 12 / 11	9 / 7 / 6	14
40	51	11	5	15
50	61	11	5	15

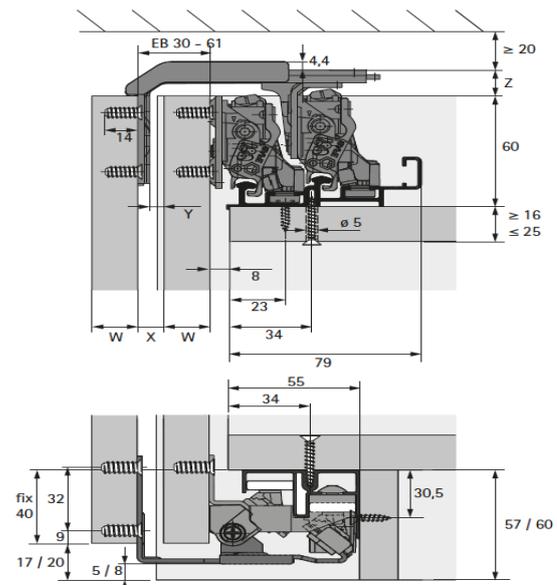

#### Operating principle / viewed from above

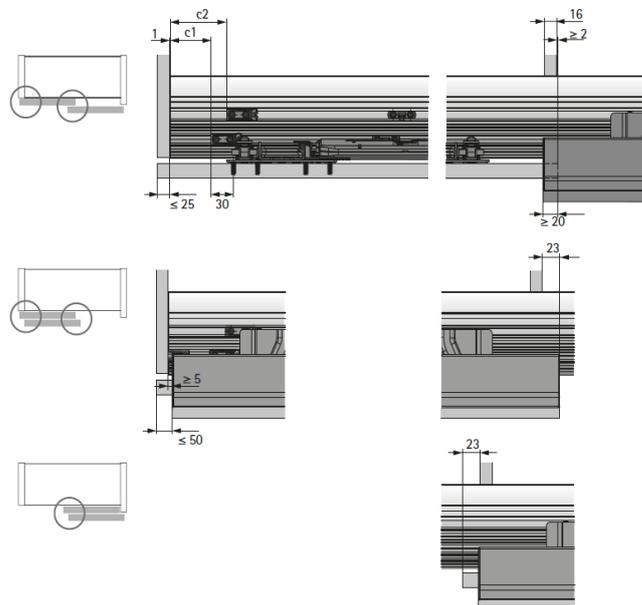

## Sliding System up to 80kgs

### Topline XL 2 Door sets

2 Door: front door left. Overlay position



2 Door: Front door right



### Topline XL 3 Door sets

3 Door: Overlay position



### Topline XL 4 Door sets\*

4 Door: Overlay position, synchronised



Item code	Description	PU	Vol/ Page
9181742	Front door set for 19mm thick	1	2/28
9183533	Right rear door set	1	2/28
9135004	4000mm Profile set (top and lower)	1	2/36
<b>Optional upgrades</b>			
9169548	Soft close & opening set	1	2/29
<b>Basic Set</b>			
9181742	Front door set for 19mm thick	1	2/30
9181744	Left Rear door set	1	2/30
9135004	4000mm Profile set (top and lower)	1	2/36
<b>Optional upgrades</b>			
9169548	Soft close & opening set	1	2/31
<b>Basic Set</b>			
9181742	Front door set for 19mm thick	1	2/32
9181744	Left Rear door set	1	2/32
9183533	Right rear door set	1	2/32
9135004	4000mm Profile set (top and lower)	1	2/36
<b>Optional upgrades</b>			
9154933	Soft close & opening set	1	2/33
<b>Basic Set</b>			
9196841	Front door set for 19mm thick	1	2/34
9196841	Front door set for 19mm thick	1	2/34
9181744	Left Rear door set	1	2/35
9183533	Right rear door set	1	2/35
9191157	4000mm Profile set Reinforced	1	2/38
9185664	Soft close & opening set/ synchronised	1	2/35

**\*4 Door set are order in only. Please allow 4 to 5 weeks for delivery Accessories for Folding and Sliding doors**

## Bottom Running up to 40kgs


### SlideLine 56

Sliding door system / bottom running

▷ SlideLine 56 / inset door position




Door size and door weight

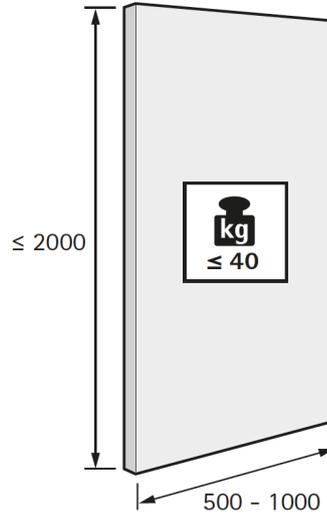


#### Technical details in brief

- Bottom running sliding door system
- Inset door position
- For wooden doors
- Door weight up to 40 kg
- Door height up to 2000 mm
- Door width 500 - 1000 mm
- For optional use with Silent System
- Runner and guide profile in aluminium
- Tested to EN 15706, Level 3

#### Operating principle

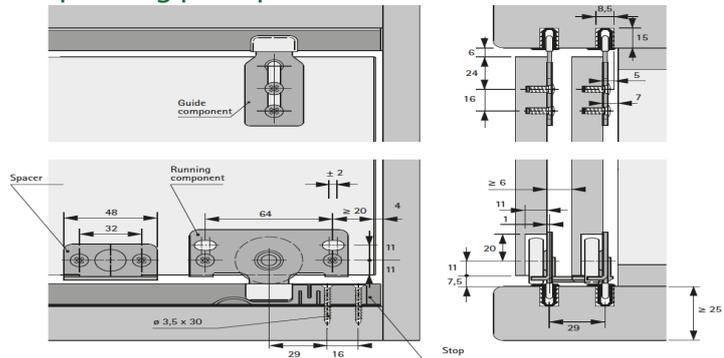

Number of door wings and door position

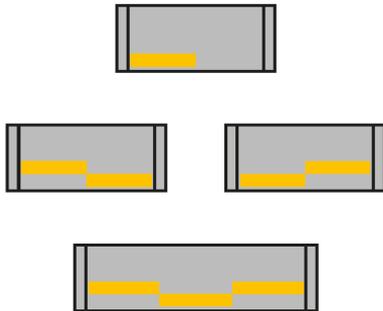

Item code	Description	PU	Vol/Page
45234	For 1 cabinet with 2 sliding doors	1	2/272
45235	For 1 cabinet with 3 sliding doors	1	2/272
9079731	Soft close set for 2 door cabinet	1	2/272
71110	3000mm silver anodized profile	1	2/272

## Bottom Running 15kgs / 30kgs

### SlideLine 55

Sliding door system / bottom running

▷ SlideLine 55 Plus / overlay and inset door position




**Attraction for the office.** SlideLine 55 Plus combines superb convenience and design with unbeatable value for money. SlideLine 55 Plus brings smooth and quiet running action to sliding doors - if preferred with

integrated Silent System. The fitting permits tool-less precision adjustment. Particularly in conjunction with overlay doors, this creates furniture with a high quality aura all of its own.


#### Technical details in brief

- 2-track, bottom running sliding door system
- Inset, overlay door position
- For wooden doors
- Door weight up to 15 kg with plastic profiles
- Door weight up to 30 kg with aluminium profiles
- Door height up to 1500 mm
- Door width 400 - 2000 mm
- Door thicknesses 16 - 19 mm
- Height adjustment +/- 1.5 mm, tool-less
- Tested to EN 15706, Level 3


Silent System	1-door	2-door
Soft closing		
Soft opening		

## Slideline 55 Plus

Operating principle / SlideLine 55 Plus with Silent System / inset door position

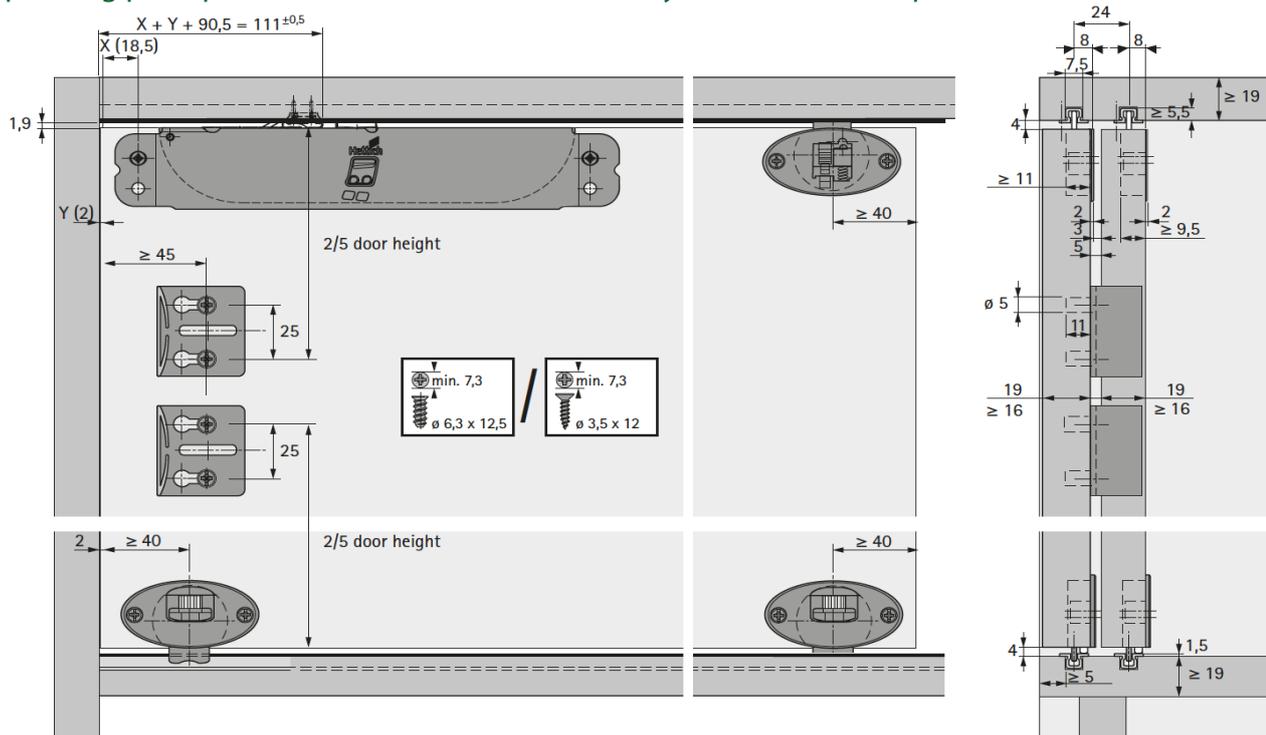

Operating principle / SlideLine 55 Plus with Silent System / overlay door position

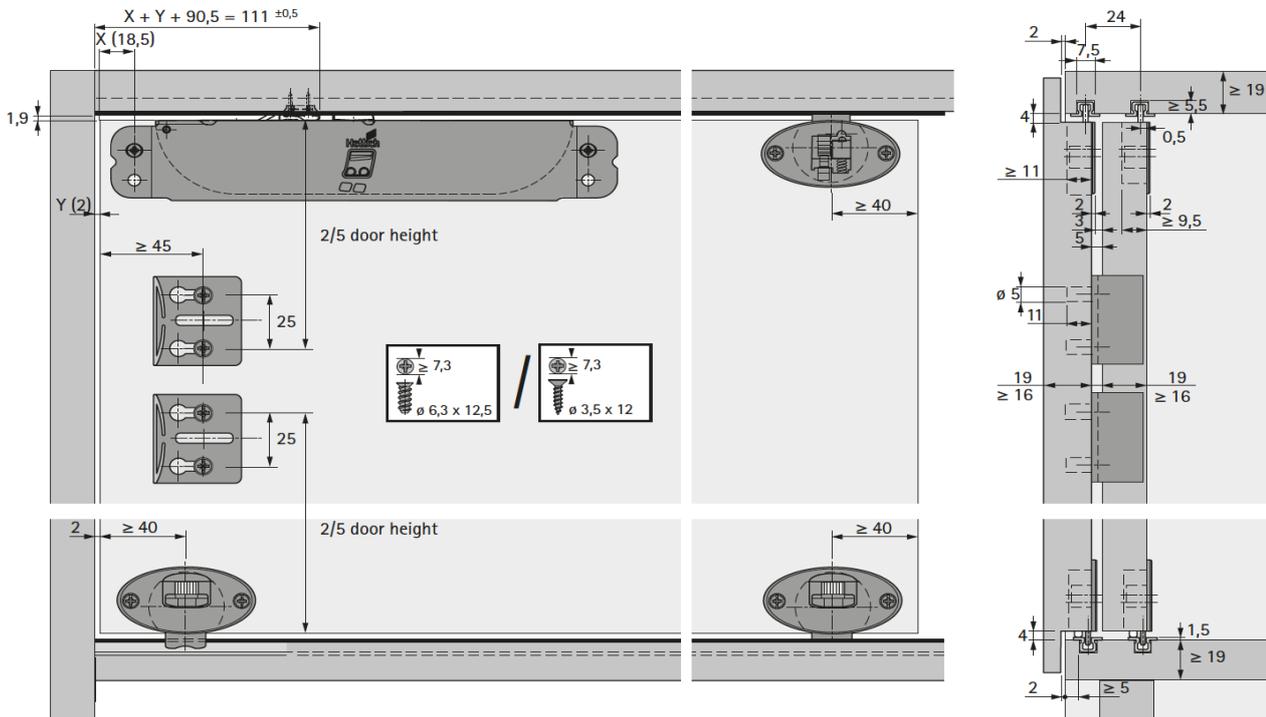

## Slideline 55 Plus

System components



Item code	Description	PU	Vol/Page
9115219	Runner component for 2 inset doors	100	2/248
2 required per door			



9115217	Guide component for 2 inset doors	100	2/248
2 required per door			



9115216	Door stop/spacer		
1 stop required for a 2 door cabinet door height < 1000mm		100	2/250
2 stops required for a 2 door cabinet door height > 1000mm		100	2/250



9115218	Stay closed function, for left or right doors	100	2/250
2 stays required per door			



25121	4000mm Brown plastic track 15Kg	30	2/251
1079090	4000mm Aluminium track 30Kg	4	2/251
(Alternative colours available Ex Germany)			2/251

## Retractable Door System

- KA 5740



**Stroke of genius.** Mounted on the KA 5740 retractable door fitting, the doors can slide back into the sides of the carcass when they are opened. Perfect, for example, for TV and multimedia furniture or for a cocktail cabinet that appears in a jiffy and disappears again just as quickly. The fitting's mechanism also vanishes from view: simply by using face frame hinges. The Hettich KA 5740 retractable door fitting is suitable for door widths of 300 to 700 mm. All options with roll-out locating catch.

- Pair of KA 5740 fittings for retractable doors  
Page reference:
- Concealed hinges must be ordered separately, see Furniture Fittings and Applications catalogue 2016, volume 1, chapter Concealed hinges
- Face frame hinge must be ordered separately, see Furniture Fittings and Applications catalogue 2016, volume 1, chapter Special hinges

Item code	Description	PU	Vol/Page
41371	KA5740 for 300mm door width max	Pair	2/390
41372	KA5740 for 350mm door width max	Pair	2/390
41373	KA5740 for 400mm door width max	Pair	2/390
41374	KA5740 for 450mm door width max	Pair	2/390
41375	KA5740 for 500mm door width max	Pair	2/390
41376	KA5740 for 550mm door width max	Pair	2/390
41377	KA5740 for 600mm door width max	Pair	2/390
41378	KA5740 for 650mm door width max	Pair	2/390
41379	KA5740 for 700mm door width max	Pair	2/390



- The KA 5740 accessory set also allows you to park flaps inside the top part of the cabinet carcass upon opening them
- The set of accessories assists the slide in and, when used on flaps, keeps them in the horizontal position


Set comprises:

- 8 door stops / spacers for pressing in,  $\varnothing$  10 mm drilling
- 4 support rollers for flaps  $\varnothing$  20 mm
- 4 rivets  $\varnothing$  6 x 10 mm
- 4 panhead screws  $\varnothing$  4 x 25 mm

9079526	KA5750 Accessory set	1	2/390
---------	----------------------	---	-------



Door height = inside carcass height - 6 mm  
Door width = inside carcass width - 6 mm  
X = door height - 2 x E

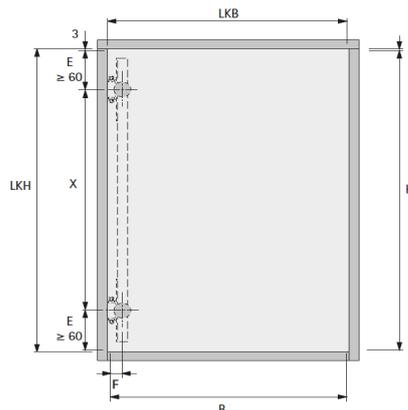

Recommended quantity of KA 5740 retractable door fittings depends on door height.

